



Sandblasted Picture Stone HP43M10L

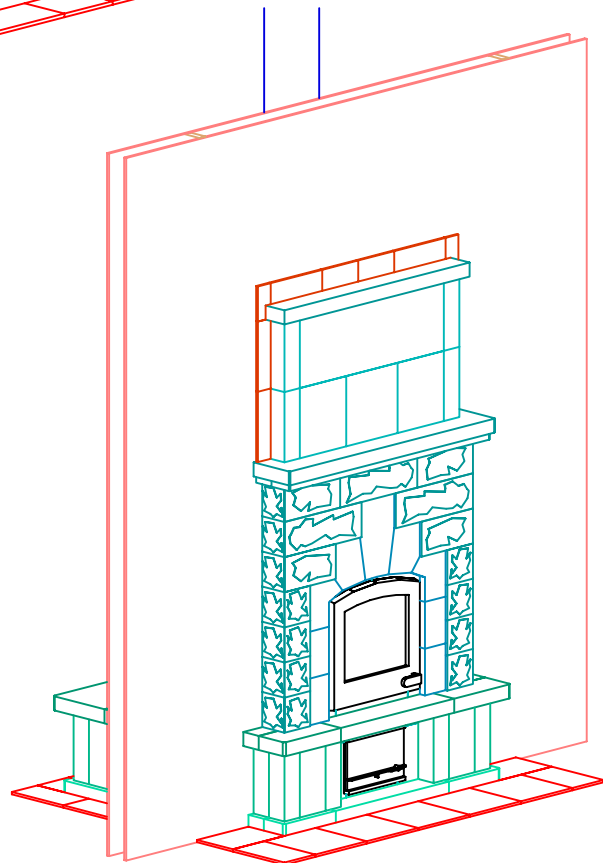

INFORMATION ONLY

NOTE: Hearth & Wall Tiles CUT AND INSTALLED by others

TULIKIVI 	MID-ATLANTIC MASONRY HEAT 1229 Harris Street Suite 1 Charlottesville, VA 22903 (434)979-9709 Fax 434-979-6416	PROJECT	BLACKWOOD	CONTRACT	5633	VIEW	PERSPECTIVE	PAGE 1
		MODEL	TTU2700	DRAWN BY	D.P.BYRAM	DATE	3/10/04	

LIVING ROOM VIEW

INFORMATION ONLY

← 8" I.D. Double Wall Black Flue Pipe by others

Soapstone Wall Tiles Installed by others

Main Damper Control

Bypass Damper Control

Sandblasted Picture Stone HP43M10L

Soapstone Arch

2220mm [87.4in]

1560mm [61.4in]

NOTE: Hearth & Wall Tiles CUT AND INSTALLED by others



MID-ATLANTIC MASONRY HEAT
1229 Harris Street Suite 1
Charlottesville, VA 22903
(434)979-9709 Fax 434-979-6416

PROJECT BLACKWOOD
MODEL TTU2700


CONTRACT 5633
DRAWN BY D.P.BYRAM

VIEW LIVING ROOM
DATE 3/10/04


PAGE

2

INFORMATION ONLY

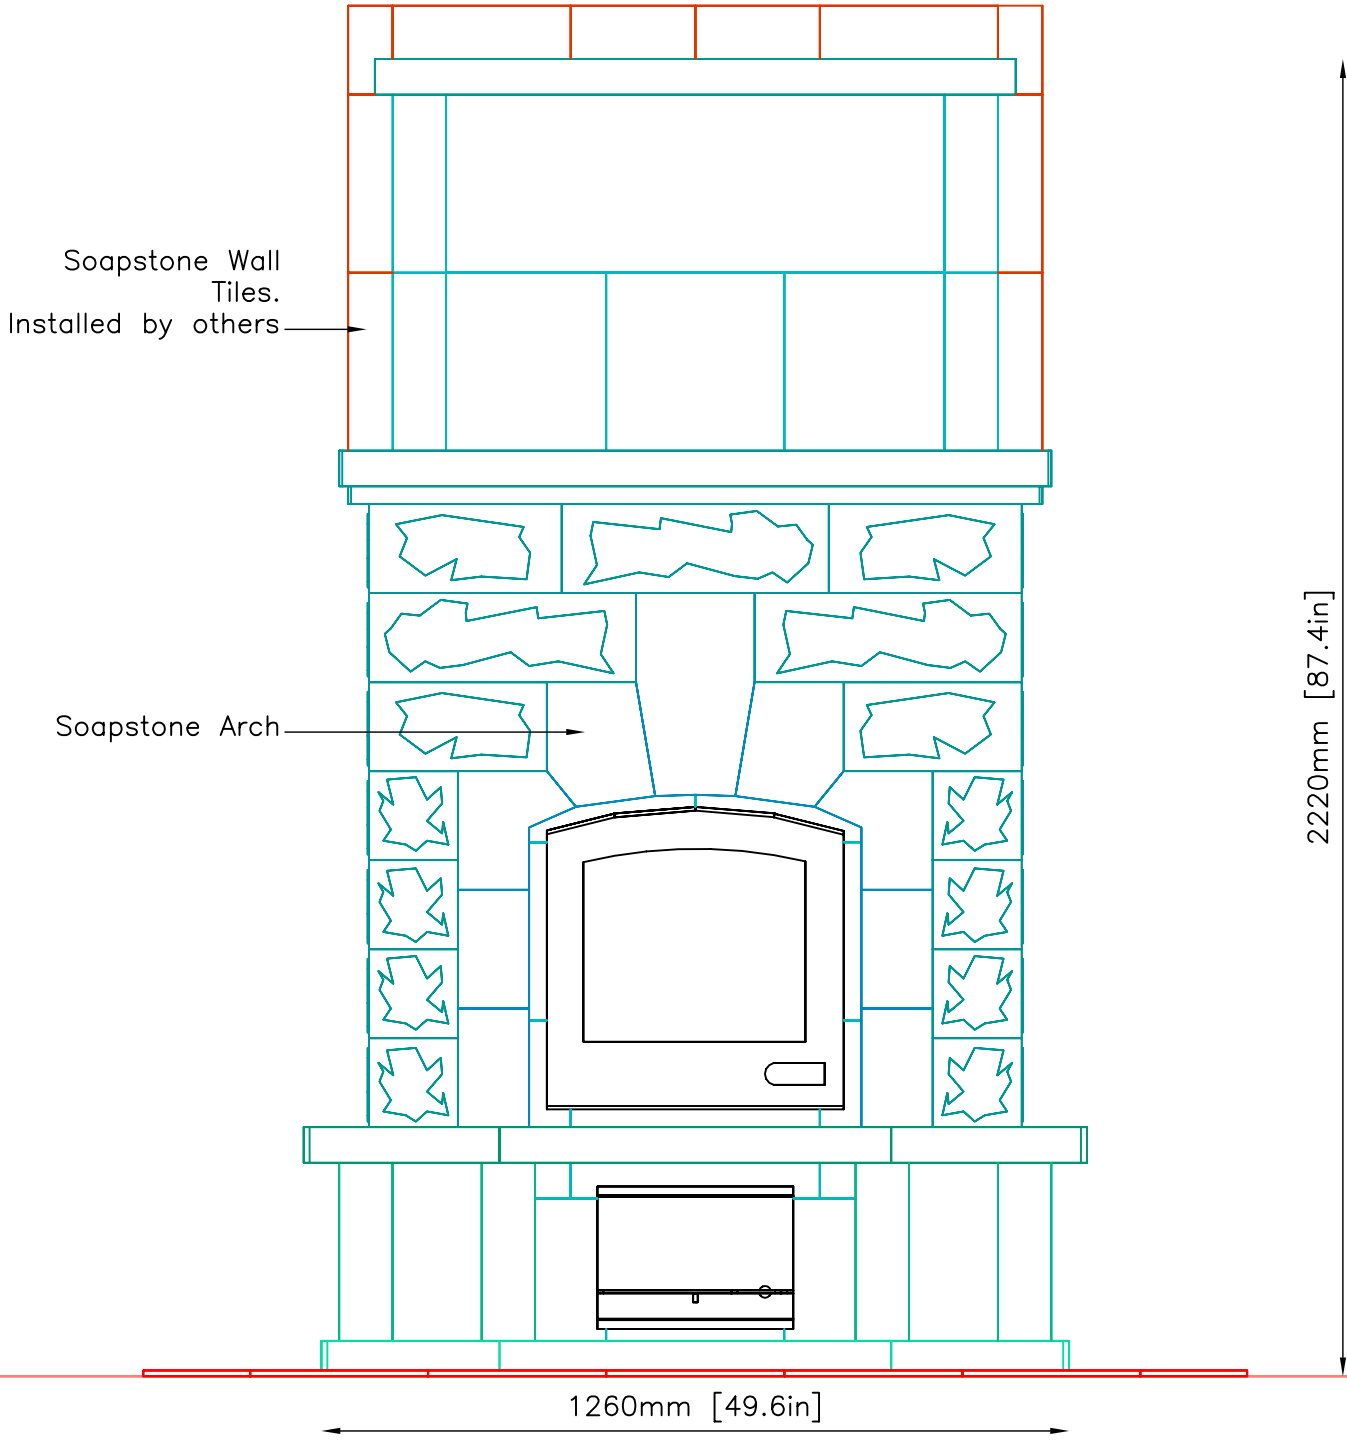

NOTE: Hearth & Wall Tiles CUT AND INSTALLED by others

TULIKIVI 	MID-ATLANTIC MASONRY HEAT 1229 Harris Street Suite 1 Charlottesville, VA 22903 (434)979-9709 Fax 434-979-6416	PROJECT	BLACKWOOD	CONTRACT	5633	VIEW	BEDROOM	PAGE 3
		MODEL	TTU2700	DRAWN BY	D.P.BYRAM	DATE	3/10/04	

SIDE VIEW


INFORMATION ONLY

8" I.D. Double Wall
Black Flue Pipe
by others
MINIMUM 6"
CLEARANCE TO
COMBUSTIBLES.

4.5" typ. Combustible
Wall by others

Main Damper
Control

Bypass Damper
Control

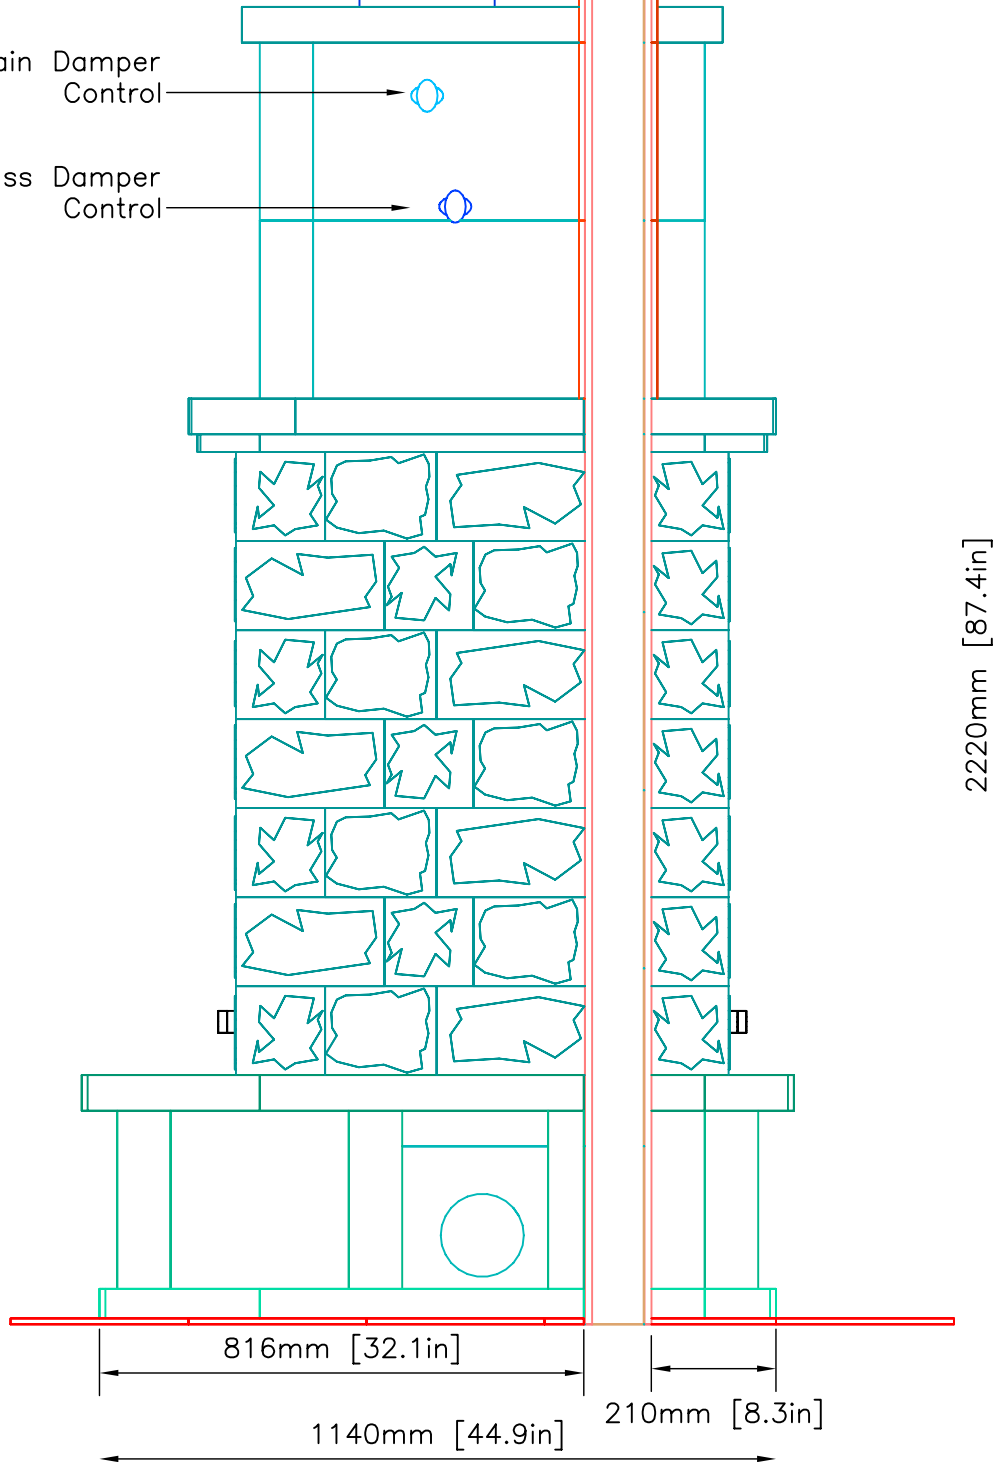

NOTE: Hearth & Wall Tiles CUT AND INSTALLED by others



MID-ATLANTIC MASONRY HEAT
1229 Harris Street Suite 1
Charlottesville, VA 22903
(434)979-9709 Fax 434-979-6416


PROJECT BLACKWOOD
MODEL TTU2700

CONTRACT 5633
DRAWN BY D.P.BYRAM

VIEW SIDE
DATE 3/10/04

PAGE 4

PLAN VIEW

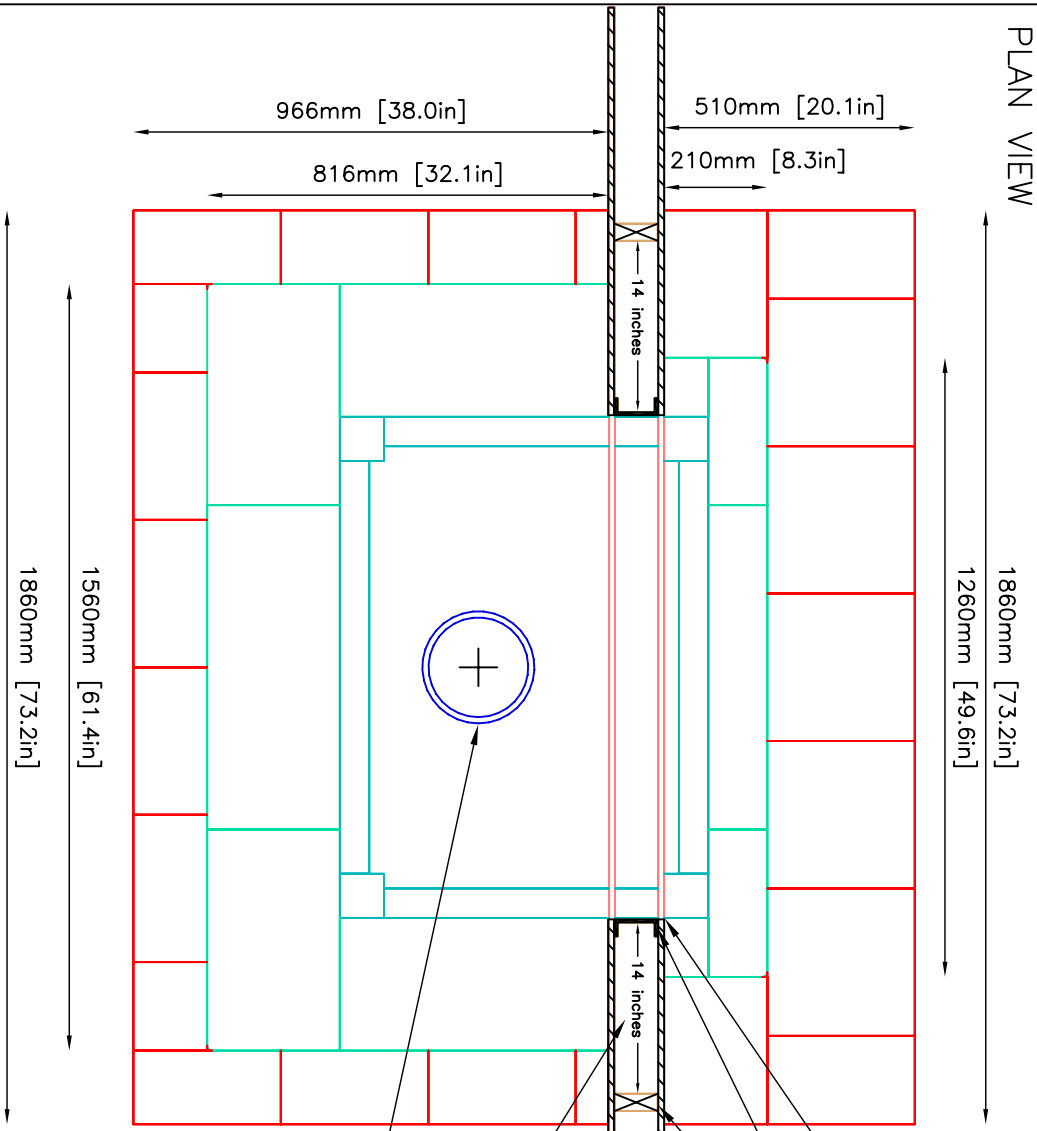

MINIMUM $\frac{1}{8}$ " Gap between Metal Studs, Cement Board and Fireplace
 MINIMUM 14" From SIDES of Fireplace to combustibles.
 Use Metal Studs and Cement Board.

NOTE: Hearth & Wall Tiles CUT AND INSTALLED by others

MINIMUM $\frac{1}{8}$ " Gap between Metal Studs, Cement Board and Fireplace

MINIMUM 14" From SIDES of Fireplace to combustibles. Use Metal Studs and Cement Board.

8" I.D. Double Wall Black Flue Pipe by others

MINIMUM 6" CLEARANCE TO COMBUSTIBLES


4.5" typ. Combustible Wall

14 inches

14 inches

Wood Stud

Metal Stud

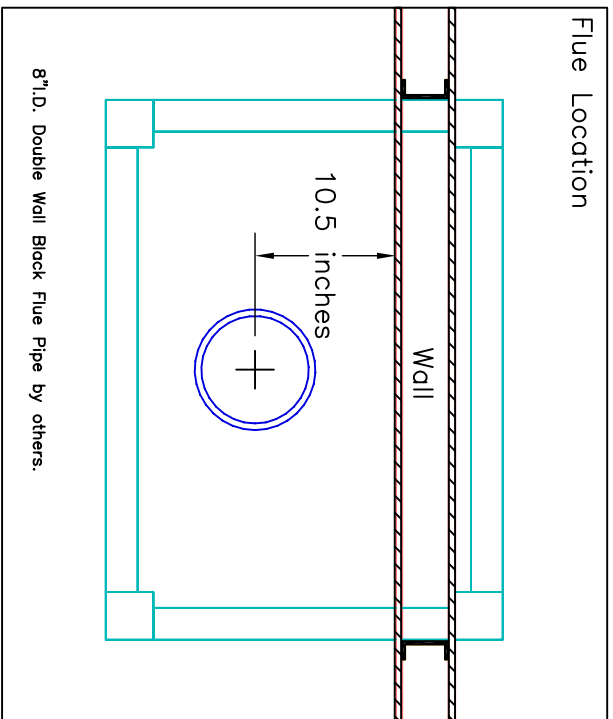


INFORMATION ONLY

FOUNDATION SLAB

Minimum 4" Thick Poured Concrete With Rebar 6"O.C.
 Minimum Dimensions--2" from Base of Unit

INFORMATION ONLY

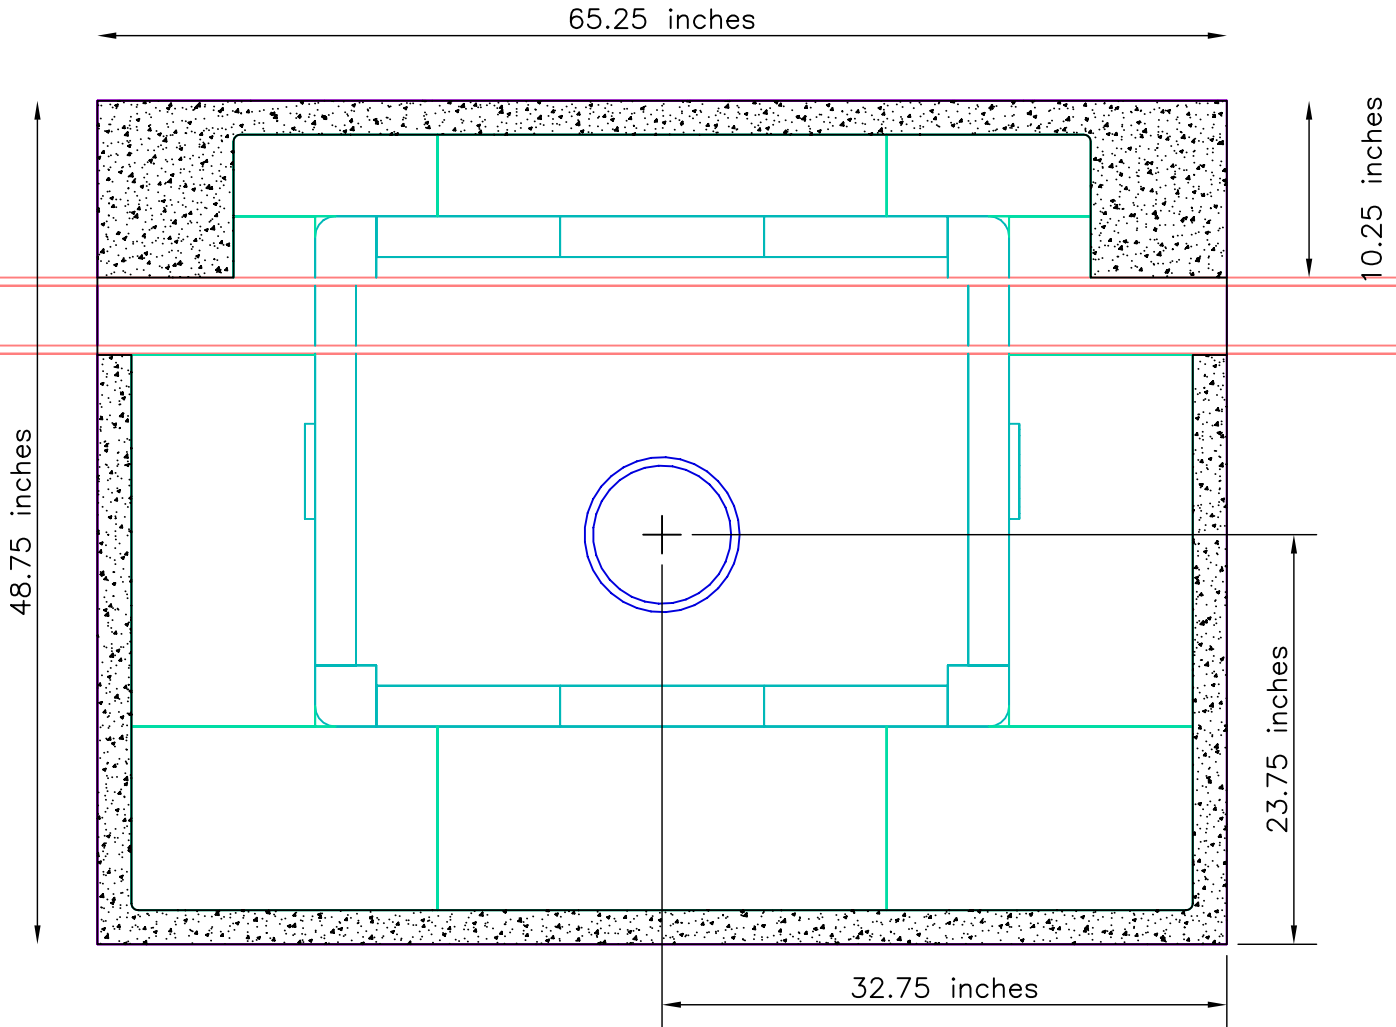

FLUE LOCATION:
 23³/₄" X 32³/₄" From Lower Right Corner of
 Foundation Slab to CENTER of Flue Pipe.

NOTE:
 TOP OF FOUNDATION SLAB TO BE LEVEL AND FLUSH WITH SUB-FLOOR
 Tolerances: +/- 1/8" No additional cost to level slab
 +/- 1/4" \$150.00-\$200.00 additional cost to level slab
 +/- 1/2" \$500.00 additional cost to level slab

UNIT WEIGHT: 10,000lbs.

Owner/Contractor is responsible for engineering Foundation Slab to support weight of fireplace.



MID-ATLANTIC MASONRY HEAT
 1229 Harris Street Suite 1
 Charlottesville, VA 22903
 (434)979-9709 Fax 434-979-6416

PROJECT BLACKWOOD
 MODEL TTU2700


CONTRACT 5633
 DRAWN BY D.P.BYRAM

VIEW SUPPORT
 DATE 3/10/04

PAGE 6

FOUNDATION SLAB:
 * MINIMUM 4" THICK
 WITH REBAR 6" O.C.
 * NON-COMBUSTIBLE
 CEMENT BOARD
 under foundation slab
 (NOT PLYWOOD)


INFORMATION ONLY

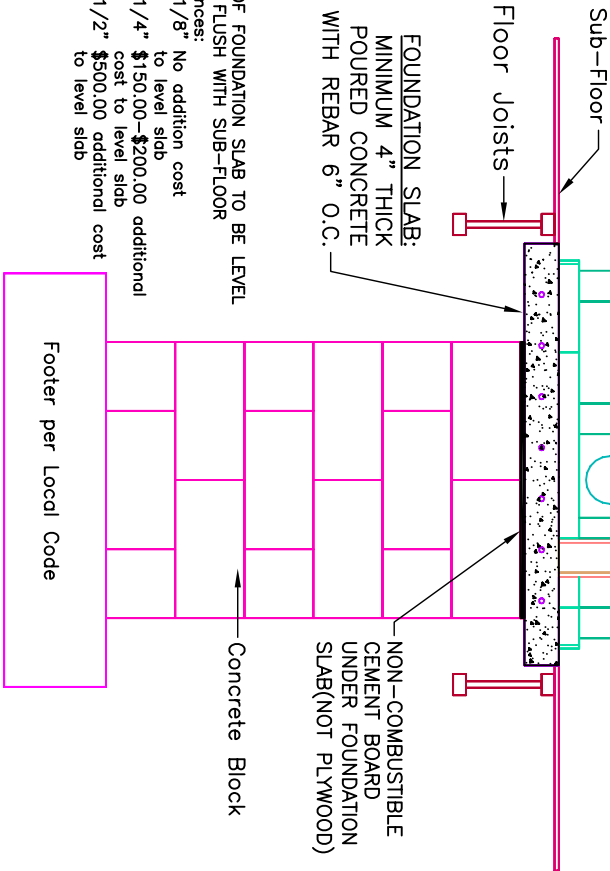


NOTE:
 TOP OF FOUNDATION SLAB TO BE LEVEL
 AND FLUSH WITH SUB-FLOOR
 Tolerances:
 +/- 1/8" No addition cost
 +/- 1/4" \$150.00-\$200.00 additional
 cost to level slab
 +/- 1/2" \$500.00 additional cost
 to level slab

UNIT WEIGHT: 10,000lbs.

Owner/Contractor is responsible for engineering Foundation Slab to support weight of fireplace.

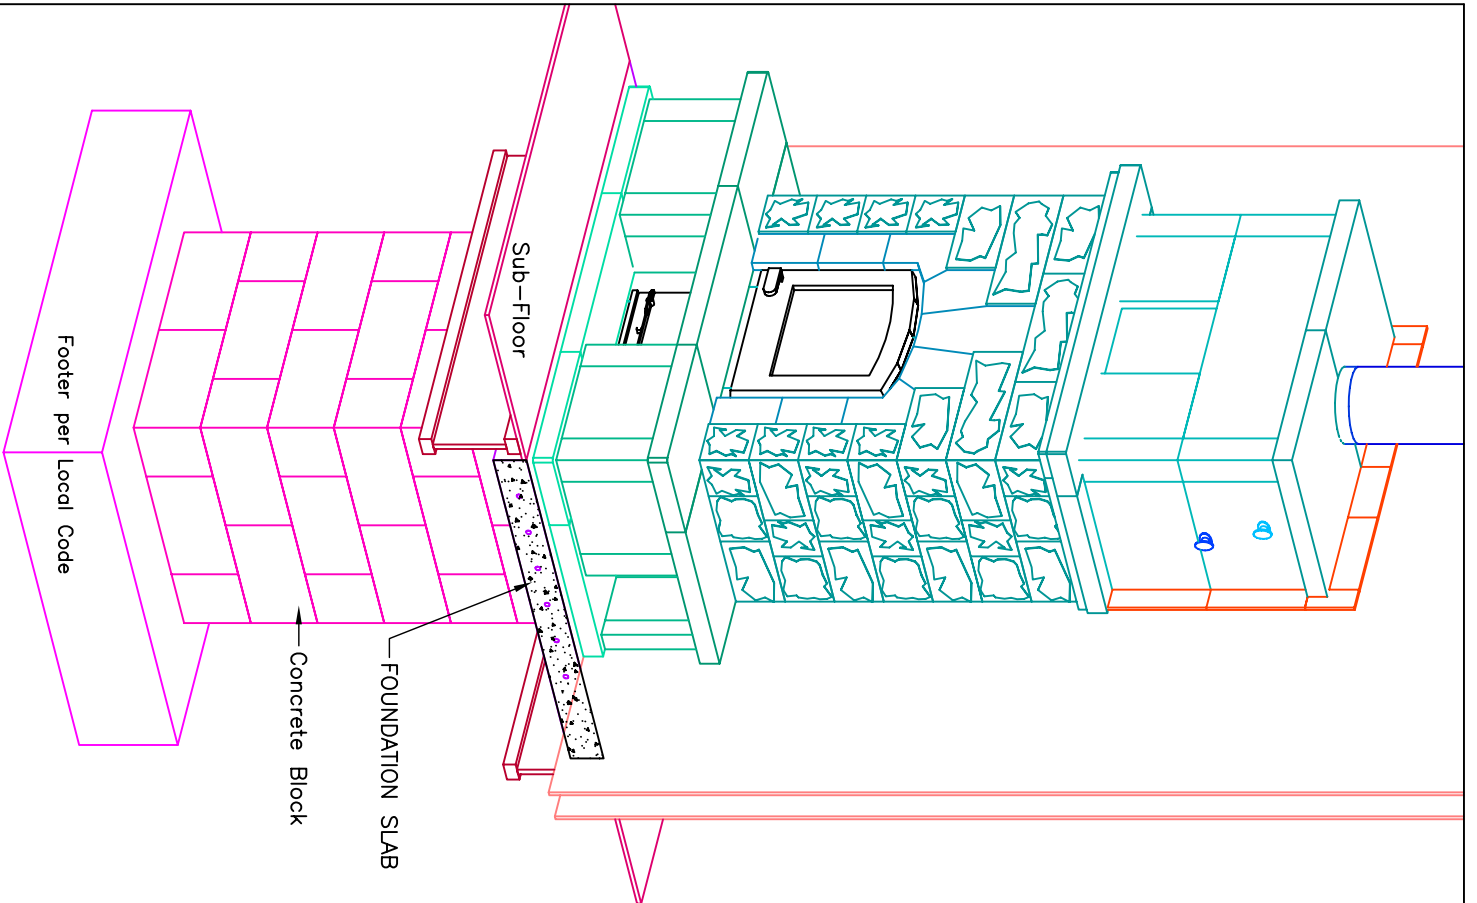

Wall Detail

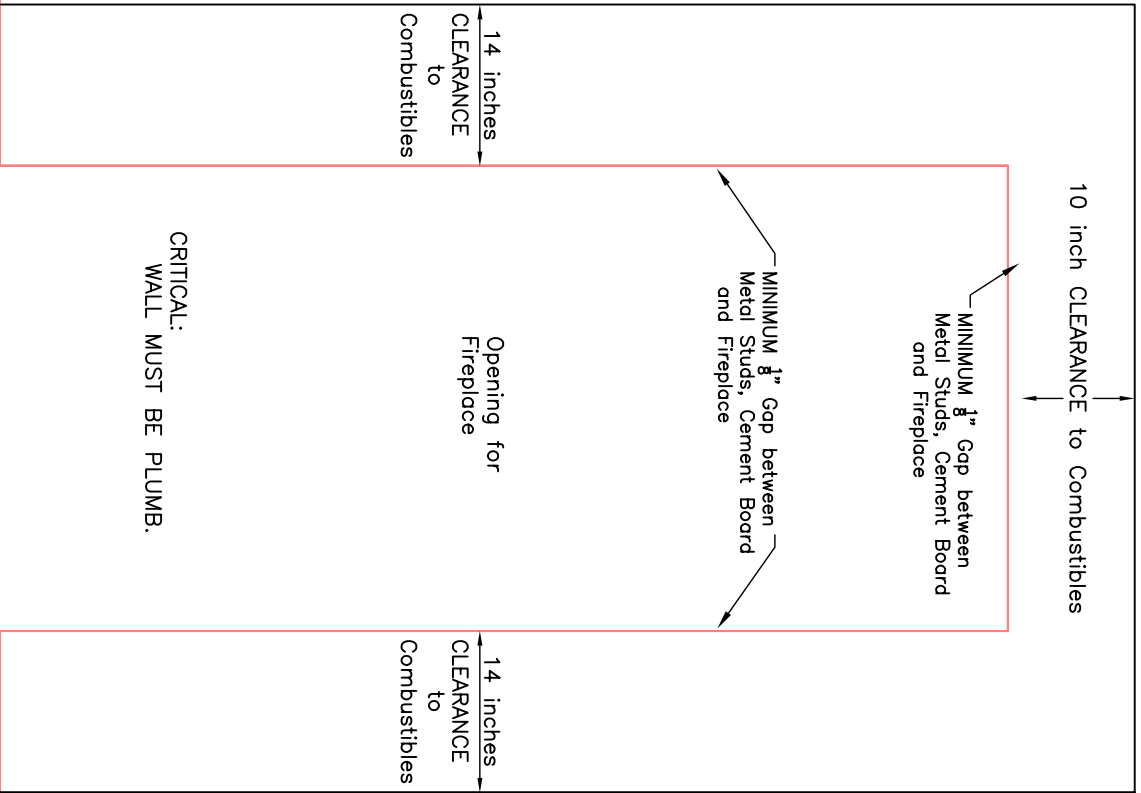

CRITICAL:
WALL MUST BE PLUMB.

Clearances to Combustible Materials:
 MINIMUM 10" Clearance to Combustible Material from TOP of Fireplace.
 MINIMUM 14" Clearance to Combustible Material from SIDES of Fireplace.
 Use Metal Studs and Cement Board.

INFORMATION ONLY

