



Revision: 1	Date: 9/10/02	By: DP
Revision: 2	Date: 9/11/02	By: DP
Revision: 3	Date: 10/8/02	By: DP
Revision: 4	Date: 10/16/03	By: DPB

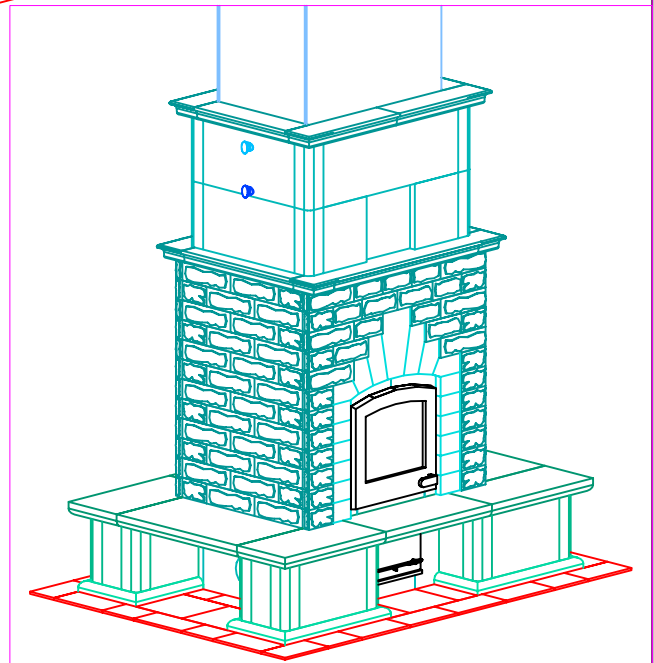

INFORMATION ONLY

NOTE: Hearth Tiles CUT AND INSTALLED by others

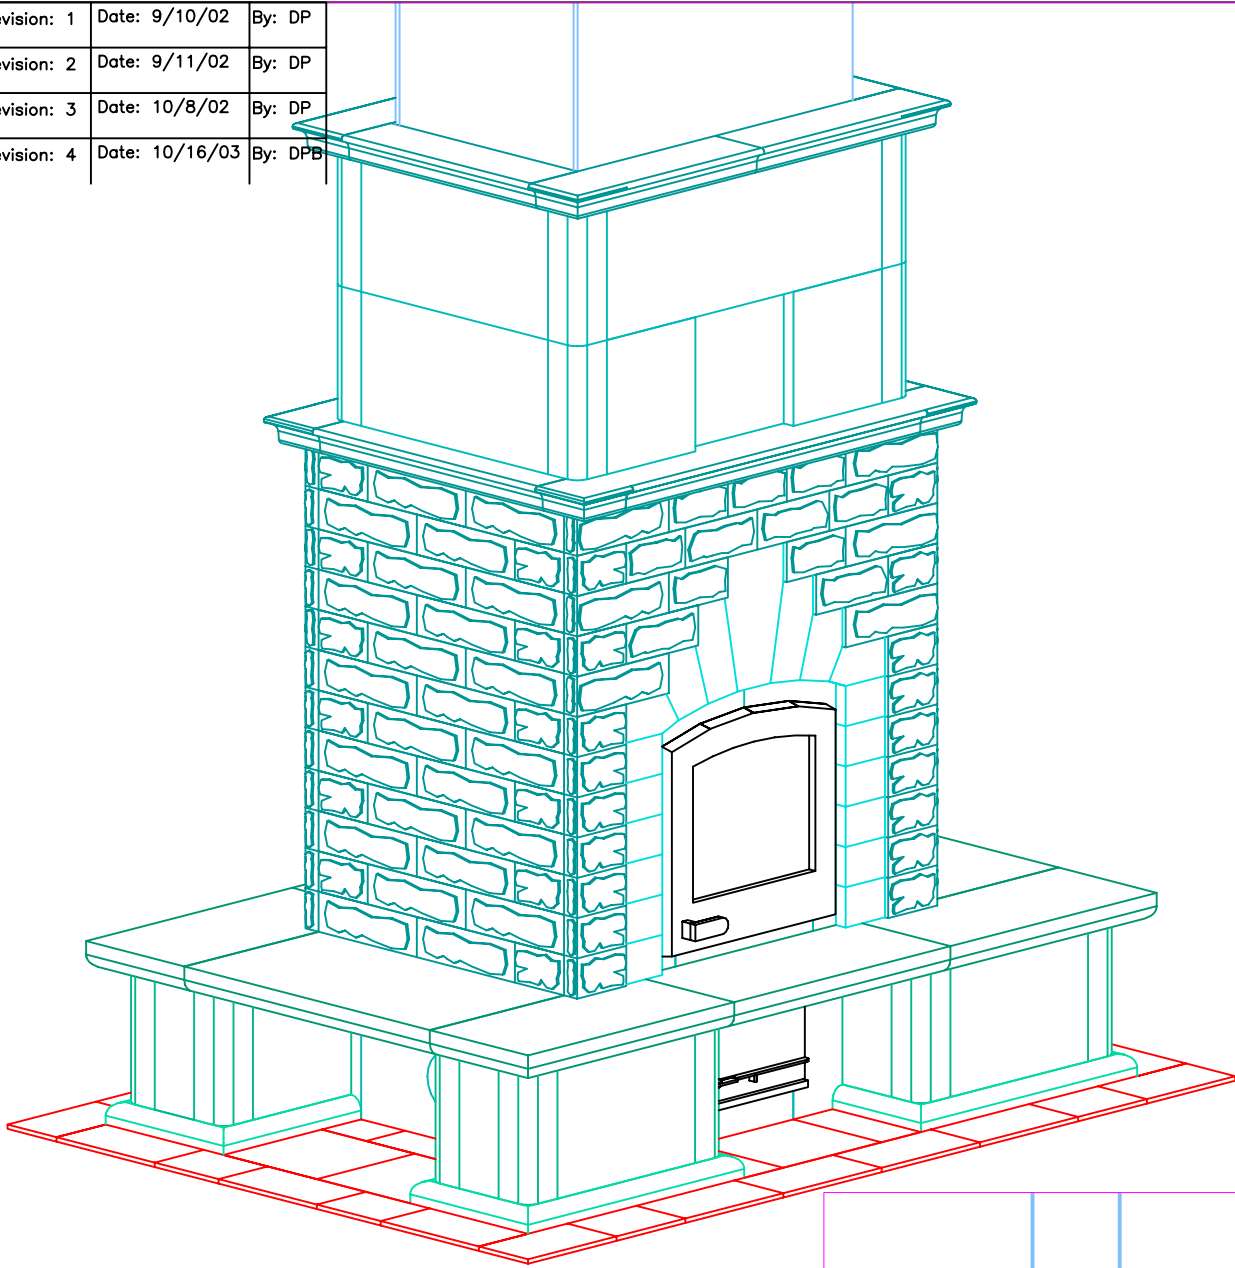

MID-ATLANTIC MASONRY HEAT
 McIntire Business Park
 Charlottesville, VA 22903
 (434)979-9709 Fax 434-979-6416

PROJECT NORANBROCK
 MODEL TTU2700/2

CONTRACT 5260
 DRAWN BY D.POWLEY


VIEW PERSPECTIVE
 DATE 9/06/02

PAGE 1

Revision: 1	Date: 9/10/02	By: DP
Revision: 2	Date: 9/11/02	By: DP
Revision: 3	Date: 10/8/02	By: DP
Revision: 4	Date: 10/16/03	By: DPB

Note: NO Combustible Material WITHIN 10" from TOP of Fireplace and 14" from SIDES of Fireplace.

INFORMATION ONLY

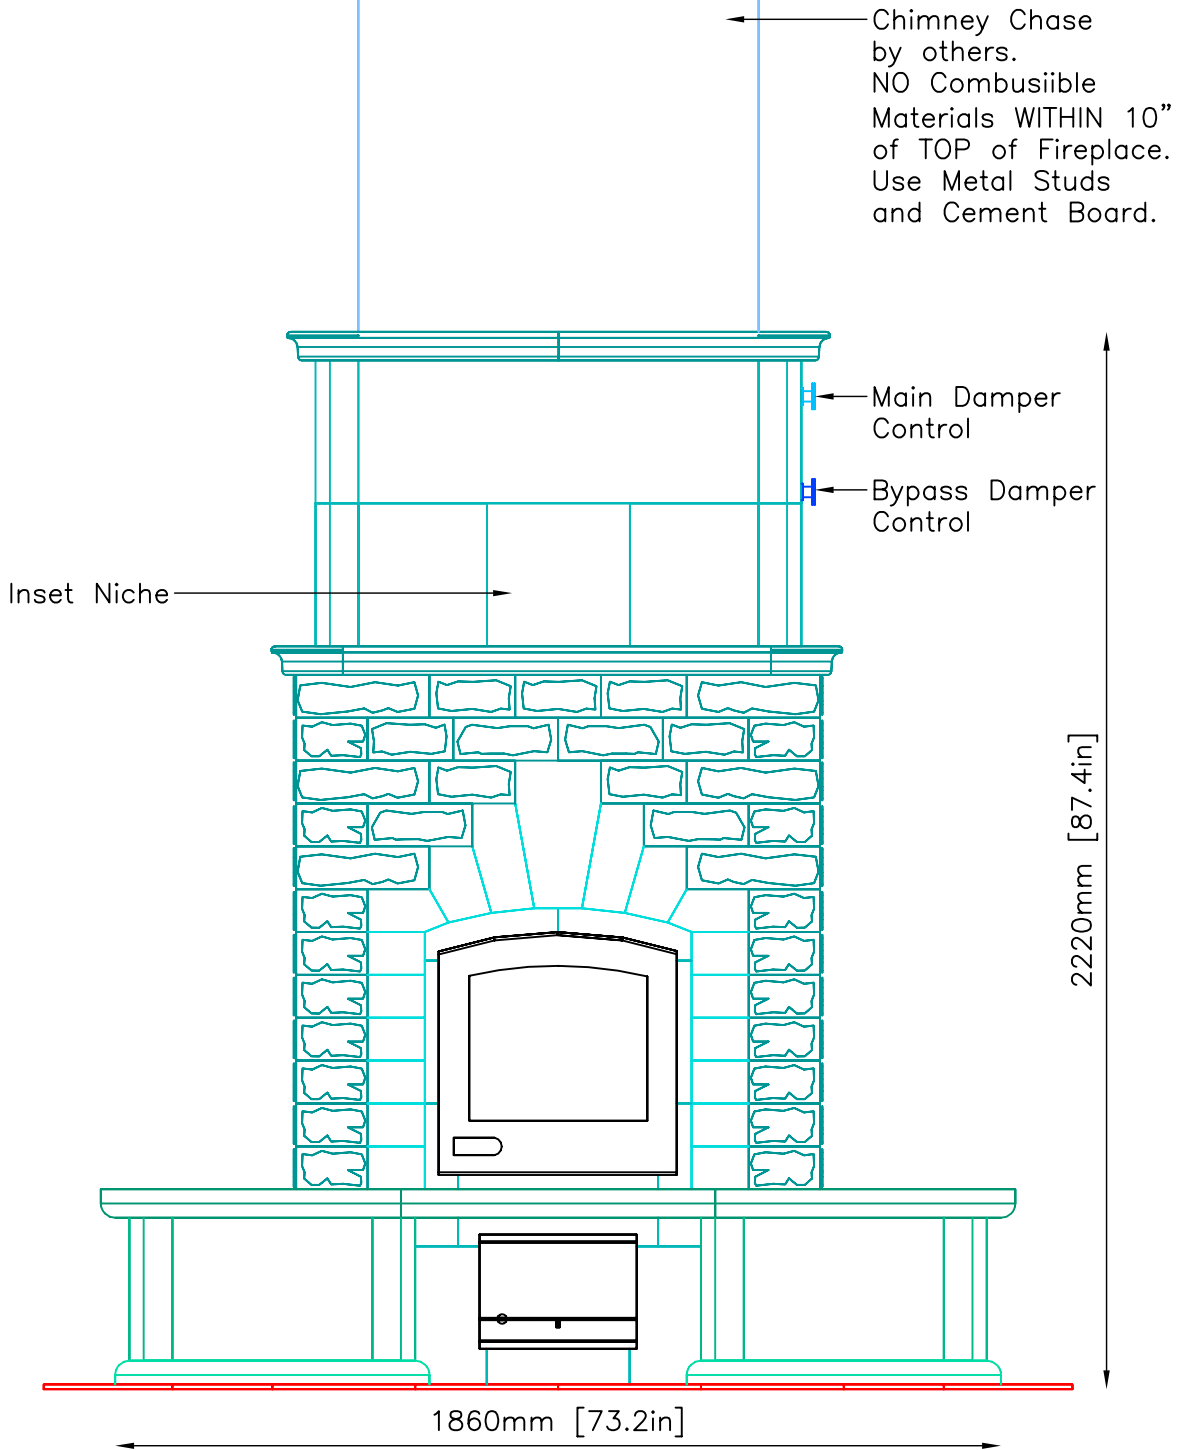


Revision: 1	Date: 9/10/02	By: DP
Revision: 2	Date: 9/11/02	By: DP
Revision: 3	Date: 10/8/02	By: DP
Revision: 4	Date: 10/16/03	By: DPB

Note: NO Combustible Material WITHIN 10" from TOP of Fireplace and 14" from SIDES of Fireplace.

Chimney Chase
by others.
NO Combustible
Materials WITHIN 10"
of TOP of Fireplace.
Use Metal Studs
and Cement Board



Main Damper Control
Bypass Damper Control

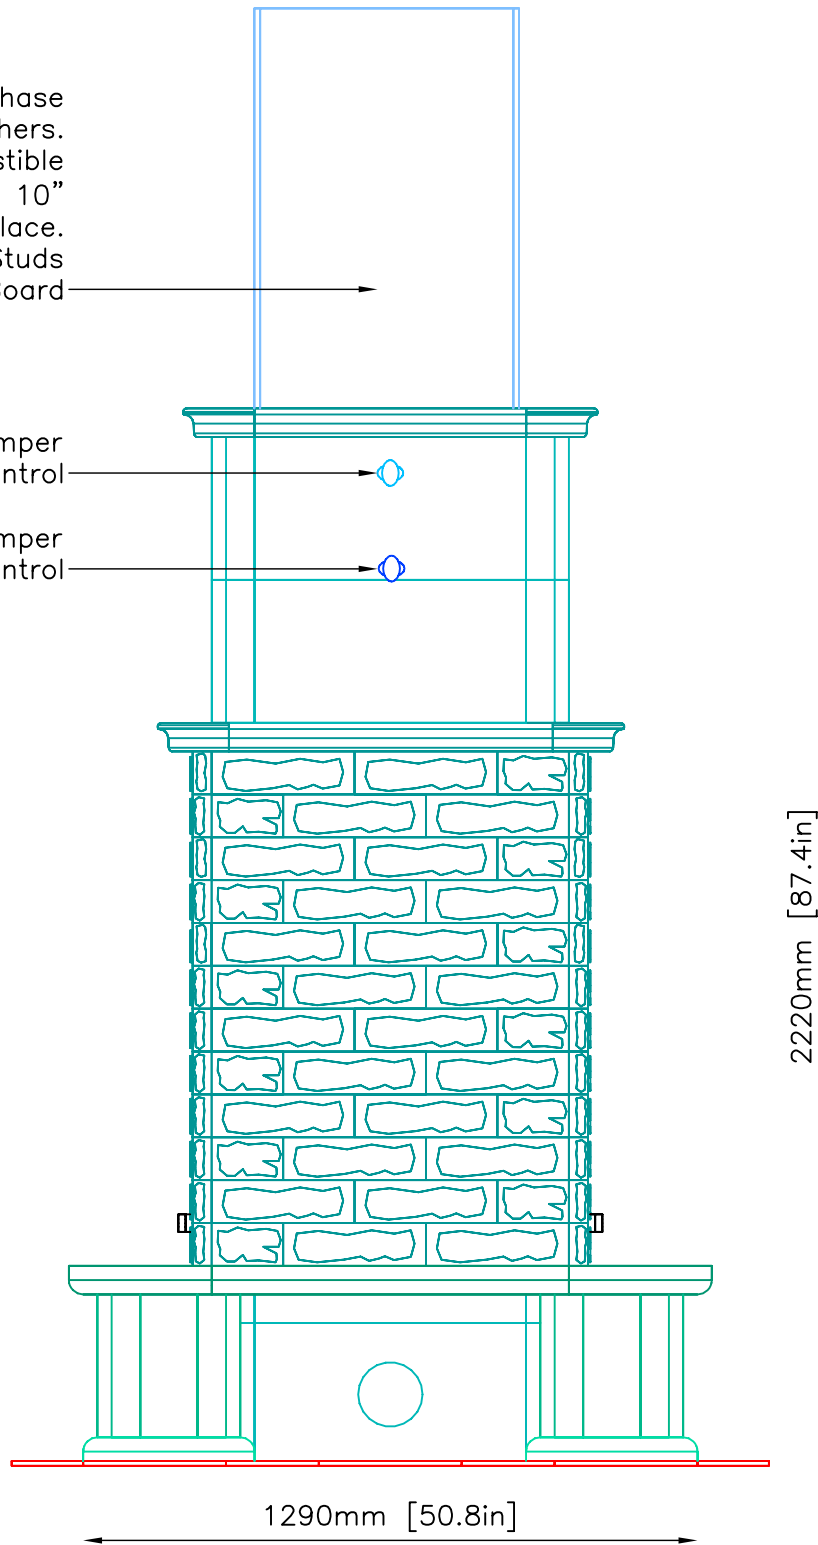

INFORMATION ONLY

Revision: 1	Date: 9/10/02	By: DP
Revision: 2	Date: 9/11/02	By: DP
Revision: 3	Date: 10/8/02	By: DP
Revision: 4	Date: 10/16/03	By: DPB

INFORMATION ONLY

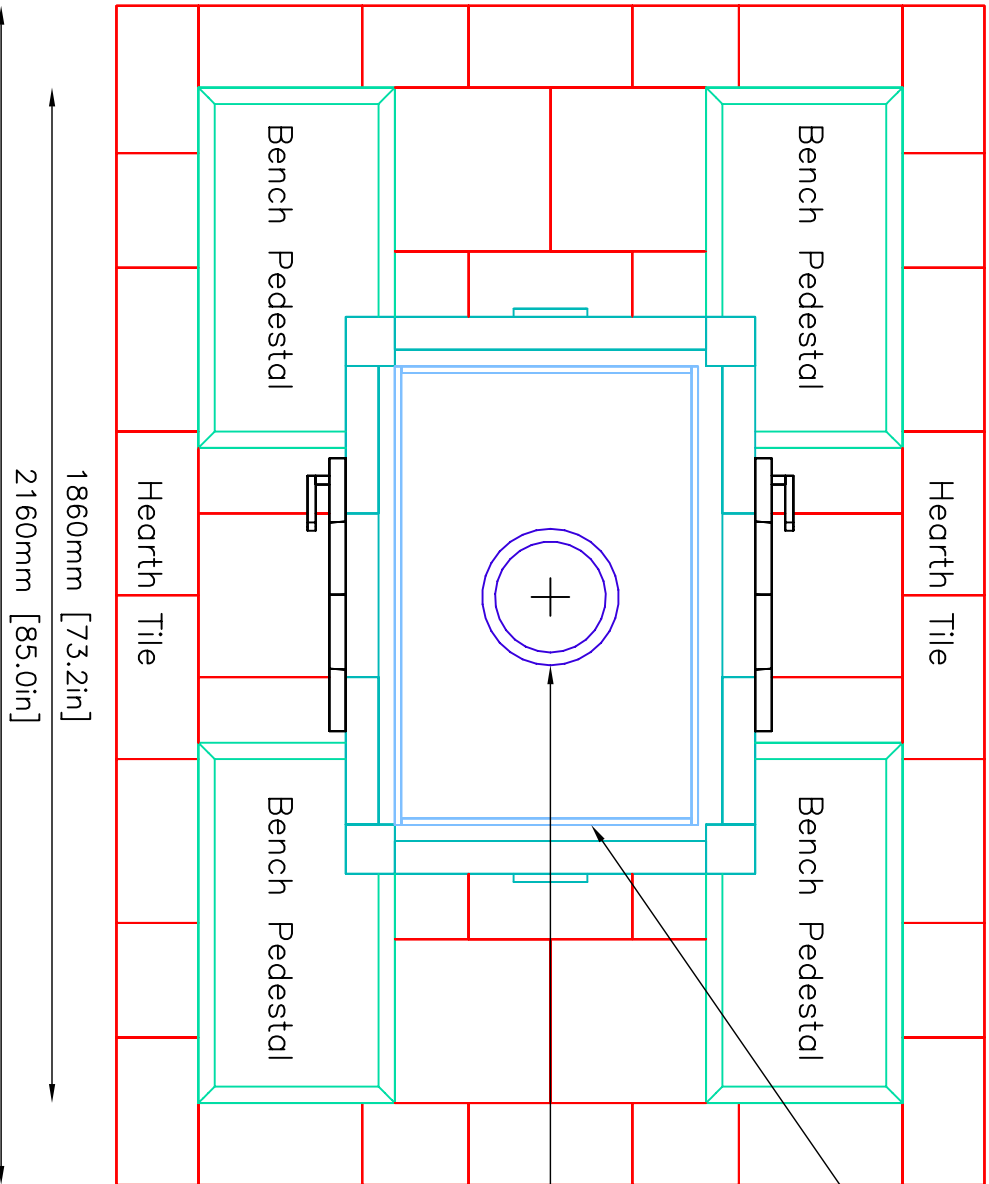

Note: NO Combustible Material WITHIN
10" from TOP of Fireplace and
14" from SIDES of Fireplace.

Chimney Chase
by others.
NO Combustible
Material WITHIN
10" from TOP
of Fireplace.
Use Metal Studs
and Cement Board.
8" I.D./10" O.D.
Double Wall
Stainless Steel
Flue Pipe
by others.
See page 5
for Flue Location.


NOTE: Hearth Tiles CUT AND INSTALLED by others

INFORMATION ONLY

FOUNDATION SLAB

Minimum 4" Thick Poured Concrete With Rebar 6"O.C.
 Minimum Dimensions--2" from Base of Unit

77.25 inches

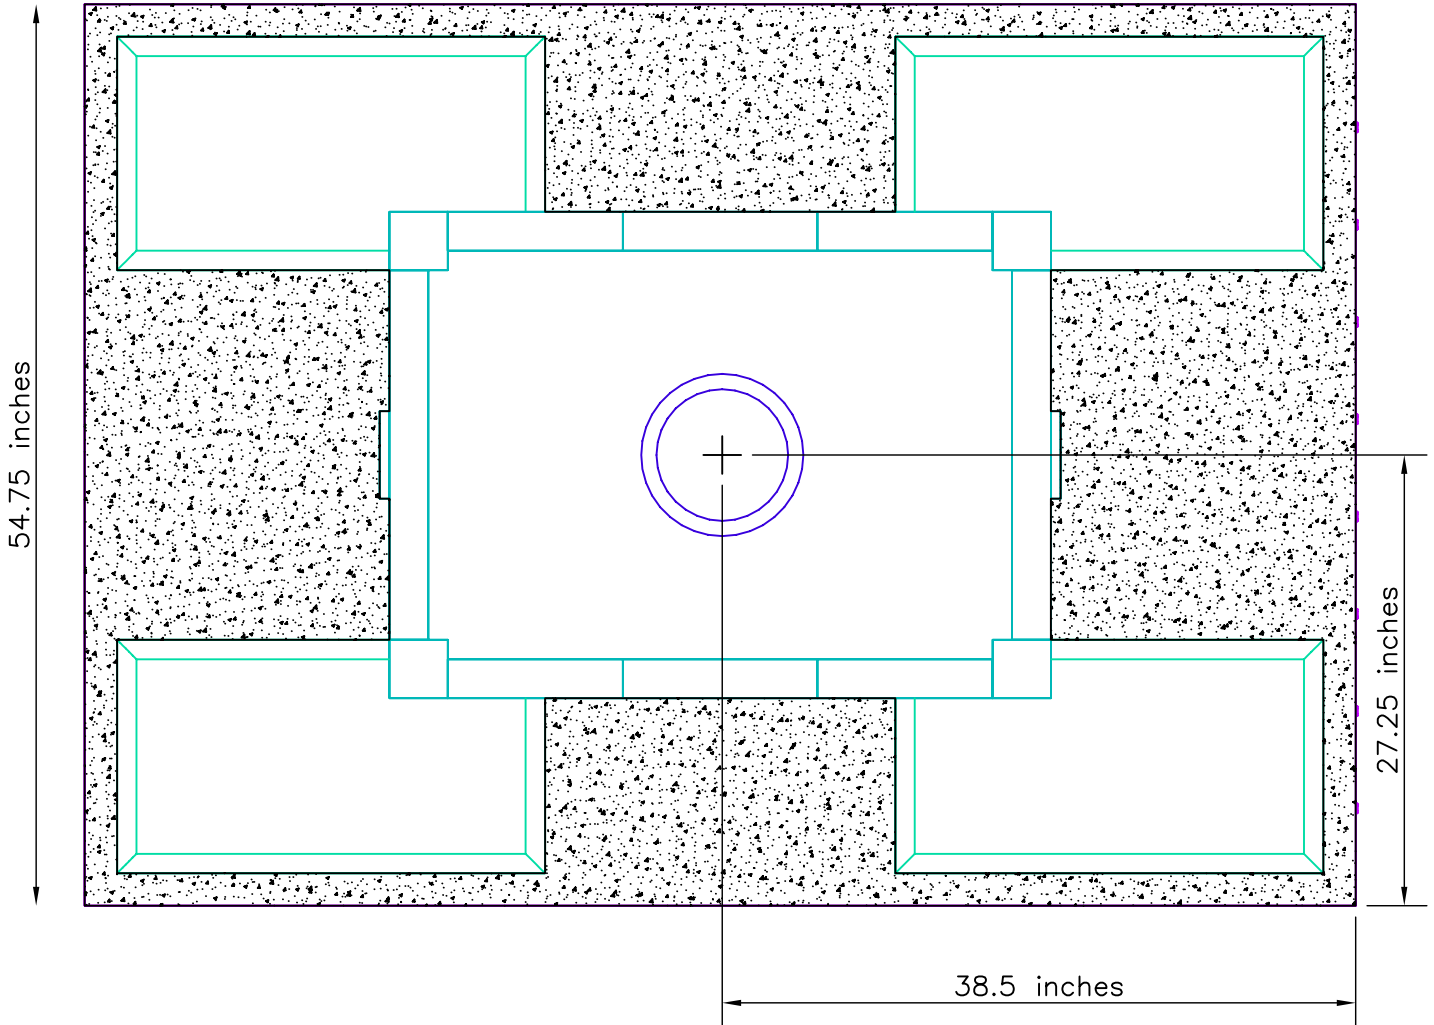

FLUE LOCATION:

From Lower Right Corner of Foundation Slab--
 27½" x 38½" to CENTER of Flue Pipe.

NOTE:

TOP OF FOUNDATION SLAB TO BE LEVEL AND FLUSH WITH SUB-FLOOR

- Tolerances: +/- 1/8" No addition cost to level slab
 +/- 1/4" \$150.00-\$200.00 additional cost to level slab
 +/- 1/2" \$500.00 additional cost to level slab

UNIT WEIGHT: 9800lbs.

Contractor is responsible for engineering foundation slab to support weight of fireplace.



MID-ATLANTIC MASONRY HEAT
 1229 Harris Street Suite 1
 Charlottesville, VA 22903
 (434)979-9709 Fax 434-979-6416

PROJECT NORANBROCK
 MODEL TTU2700/2

CONTRACT 5260
 DRAWN BY D.POWLEY

VIEW SUPPORT
 DATE 9/06/02

PAGE

5