


Revision: 1 Date: 10/21/03 By: DPB

Revision: 2 Date: 3/12/04 By: DPB

INFORMATION ONLY

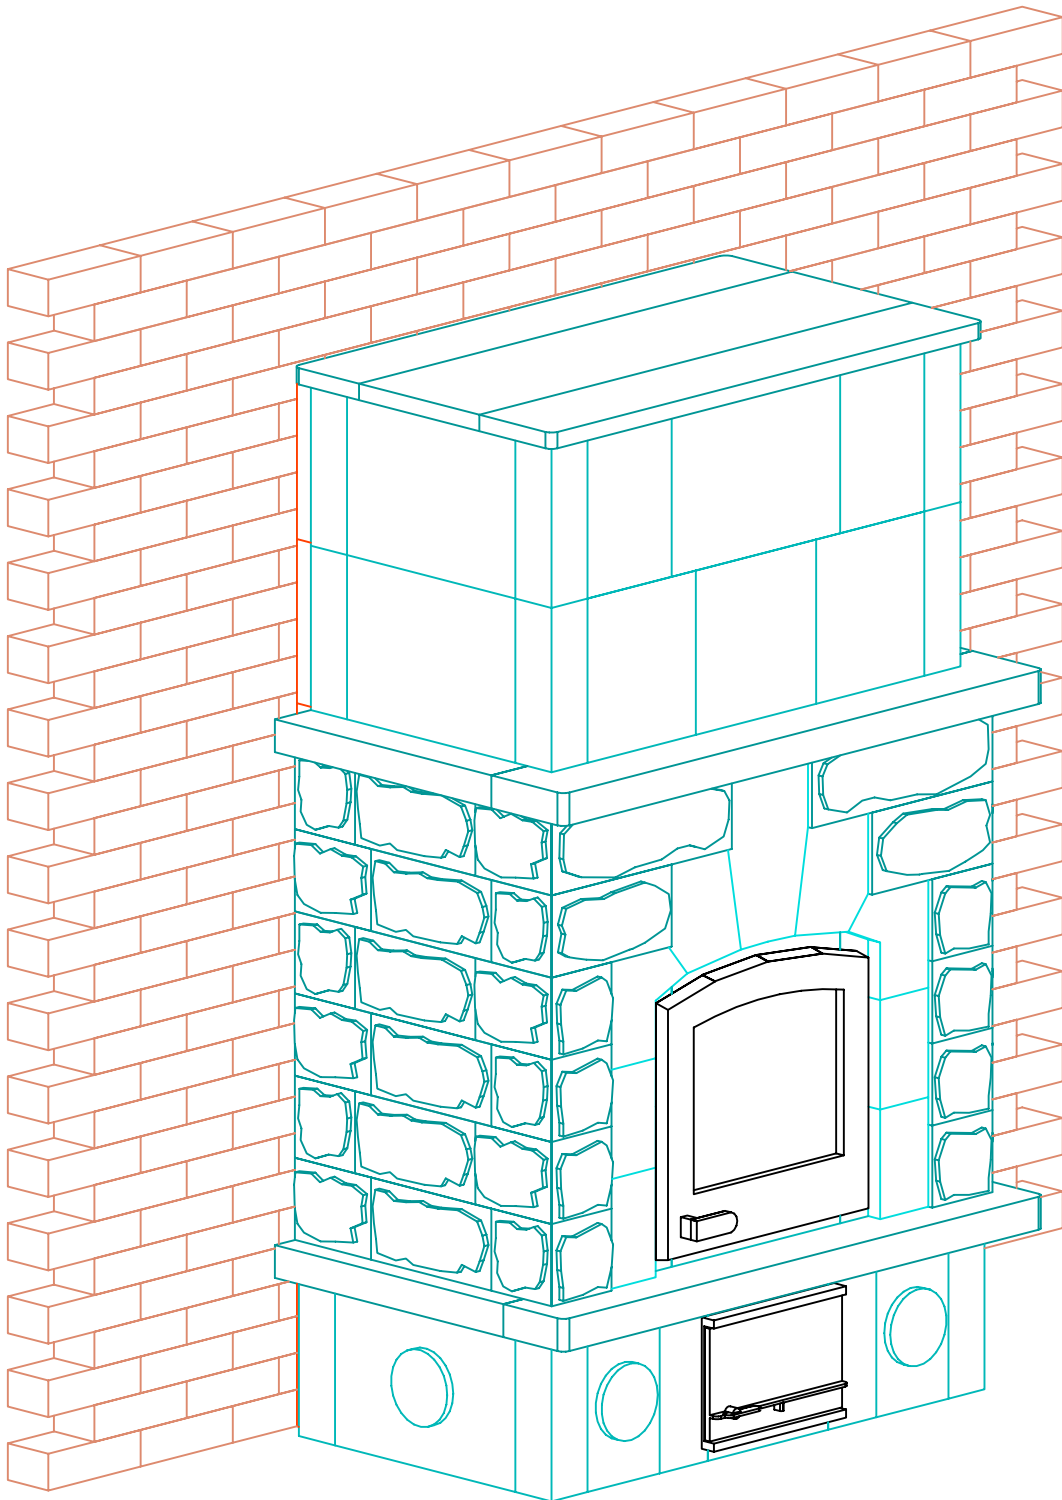

Note: "Blue Pearl"
Granite Arch



MID-ATLANTIC MASONRY HEAT
 1229 Harris Street Suite 1
 Charlottesville, VA 22903
 (434)979-9709 Fax 434-979-6416

PROJECT HIRSCH
 MODEL TU2200

CONTRACT 5490
 DRAWN BY D.P.BYRAM

VIEW PERSPECTIVE
 DATE 10/13/03


PAGE 1

Revision: 1 Date: 10/21/03 By: DPB

Revision: 2 Date: 3/12/04 By: DPB

FRONT VIEW

INFORMATION ONLY

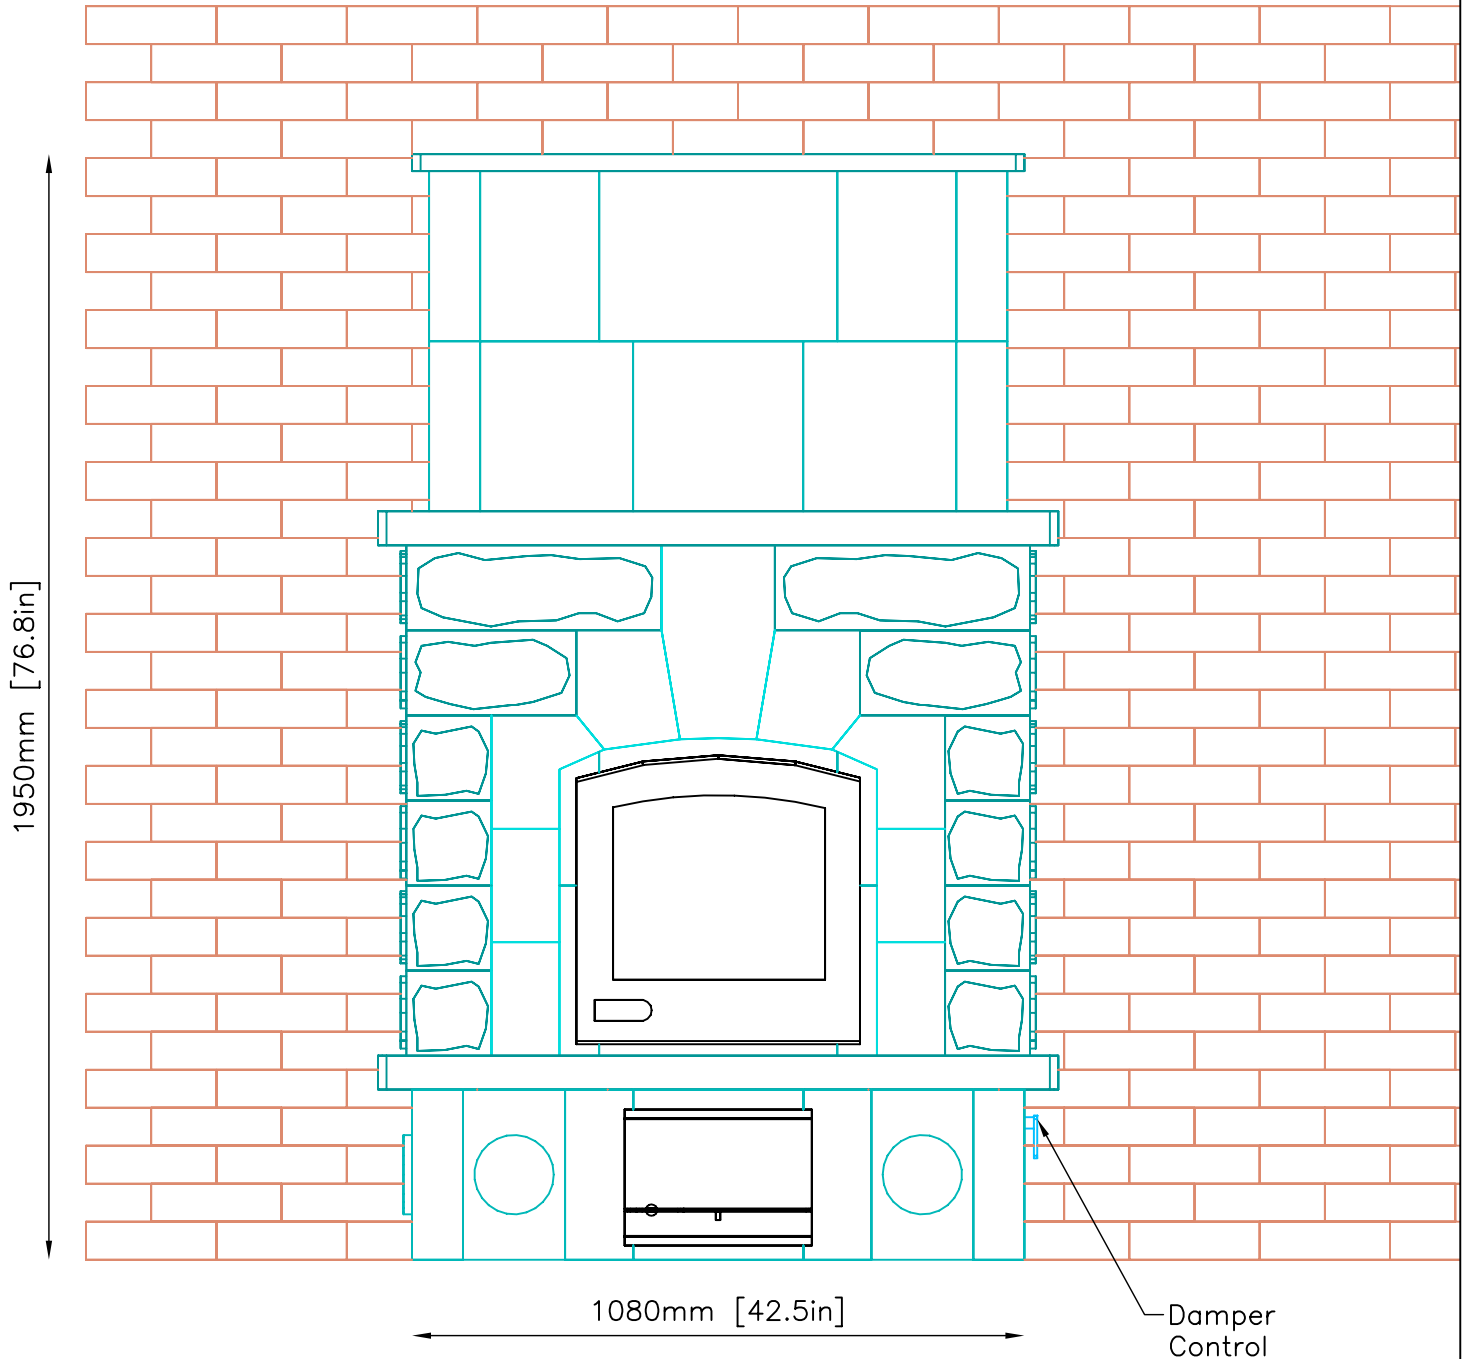

Note: "Blue Pearl"
Granite Arch



MID-ATLANTIC MASONRY HEAT
1229 Harris Street Suite 1
Charlottesville, VA 22903
(434)979-9709 Fax 434-979-6416

PROJECT HIRSCH
MODEL TU2200

CONTRACT 5490
DRAWN BY D.P.BYRAM

VIEW FRONT
DATE 10/13/03


PAGE 2

Revision: 1 Date: 10/21/03 By: DPB

Revision: 2 Date: 3/12/04 By: DPB

SIDE VIEW

INFORMATION ONLY

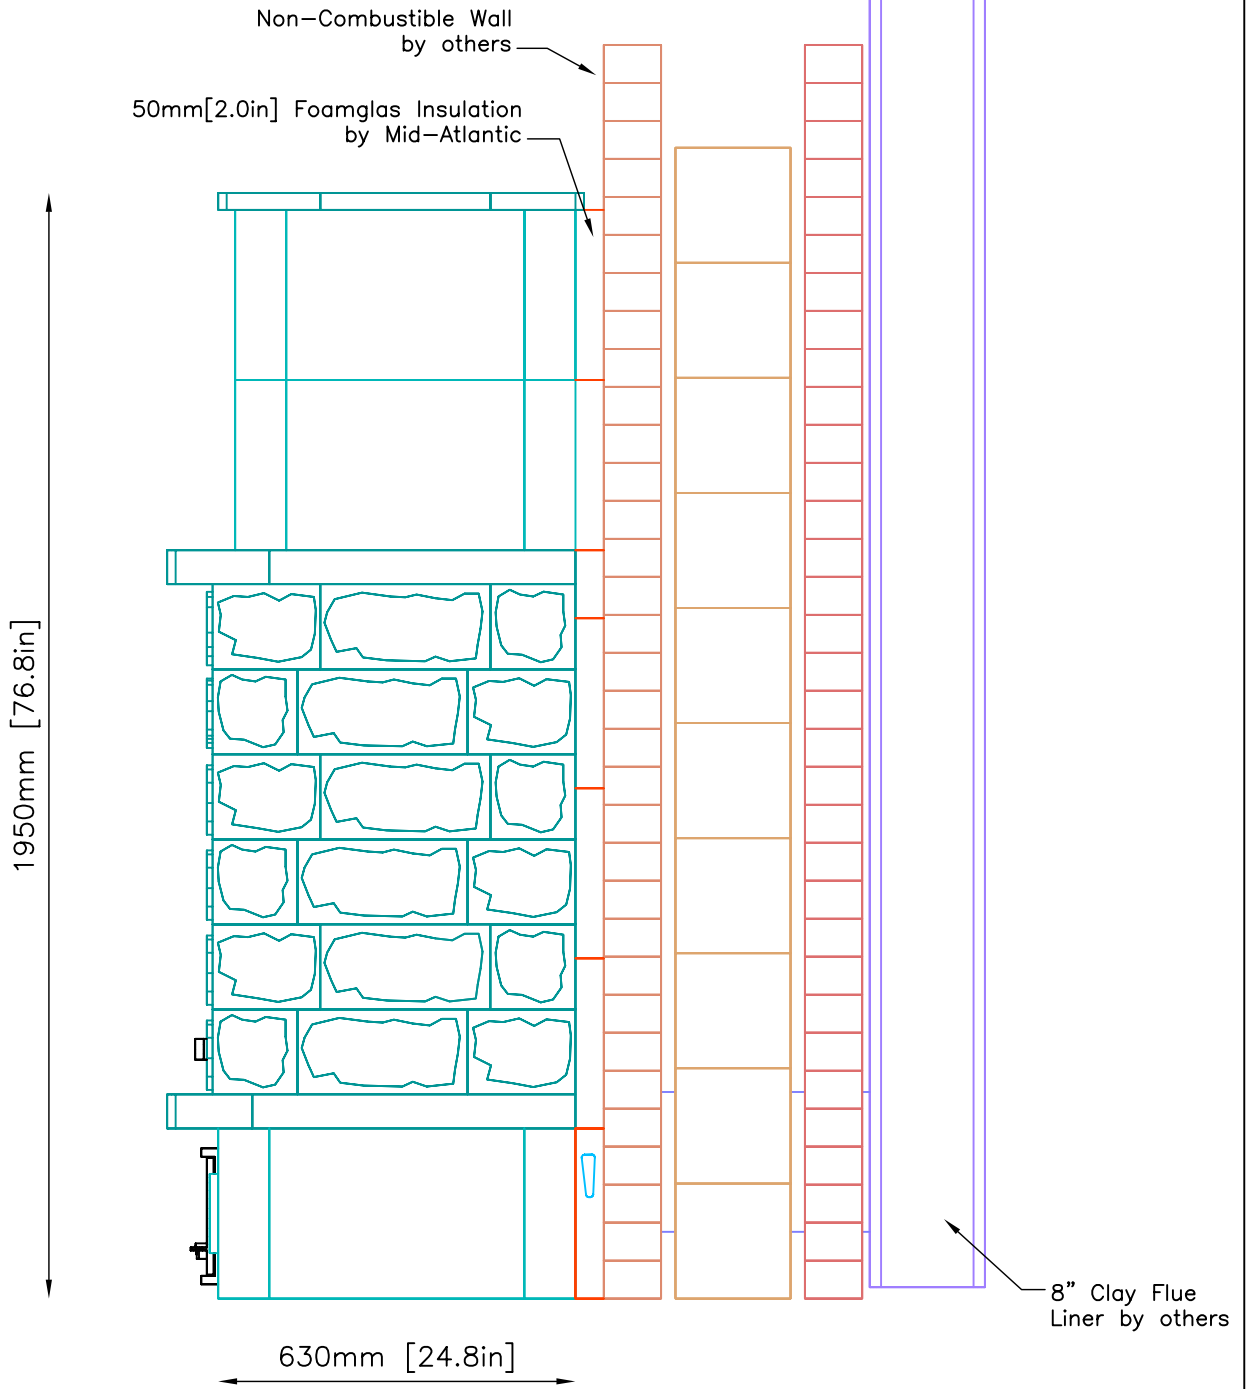

MID-ATLANTIC MASONRY HEAT
1229 Harris Street Suite 1
Charlottesville, VA 22903
(434)979-9709 Fax 434-979-6416

PROJECT HIRSCH
MODEL TU2200

CONTRACT 5490
DRAWN BY D.P.BYRAM


VIEW SIDE
DATE 10/13/03

PAGE 3

INFORMATION ONLY

Revision: 1	Date: 10/21/03	By: DPB
Revision: 2	Date: 3/12/04	By: DPB

PLAN VIEW


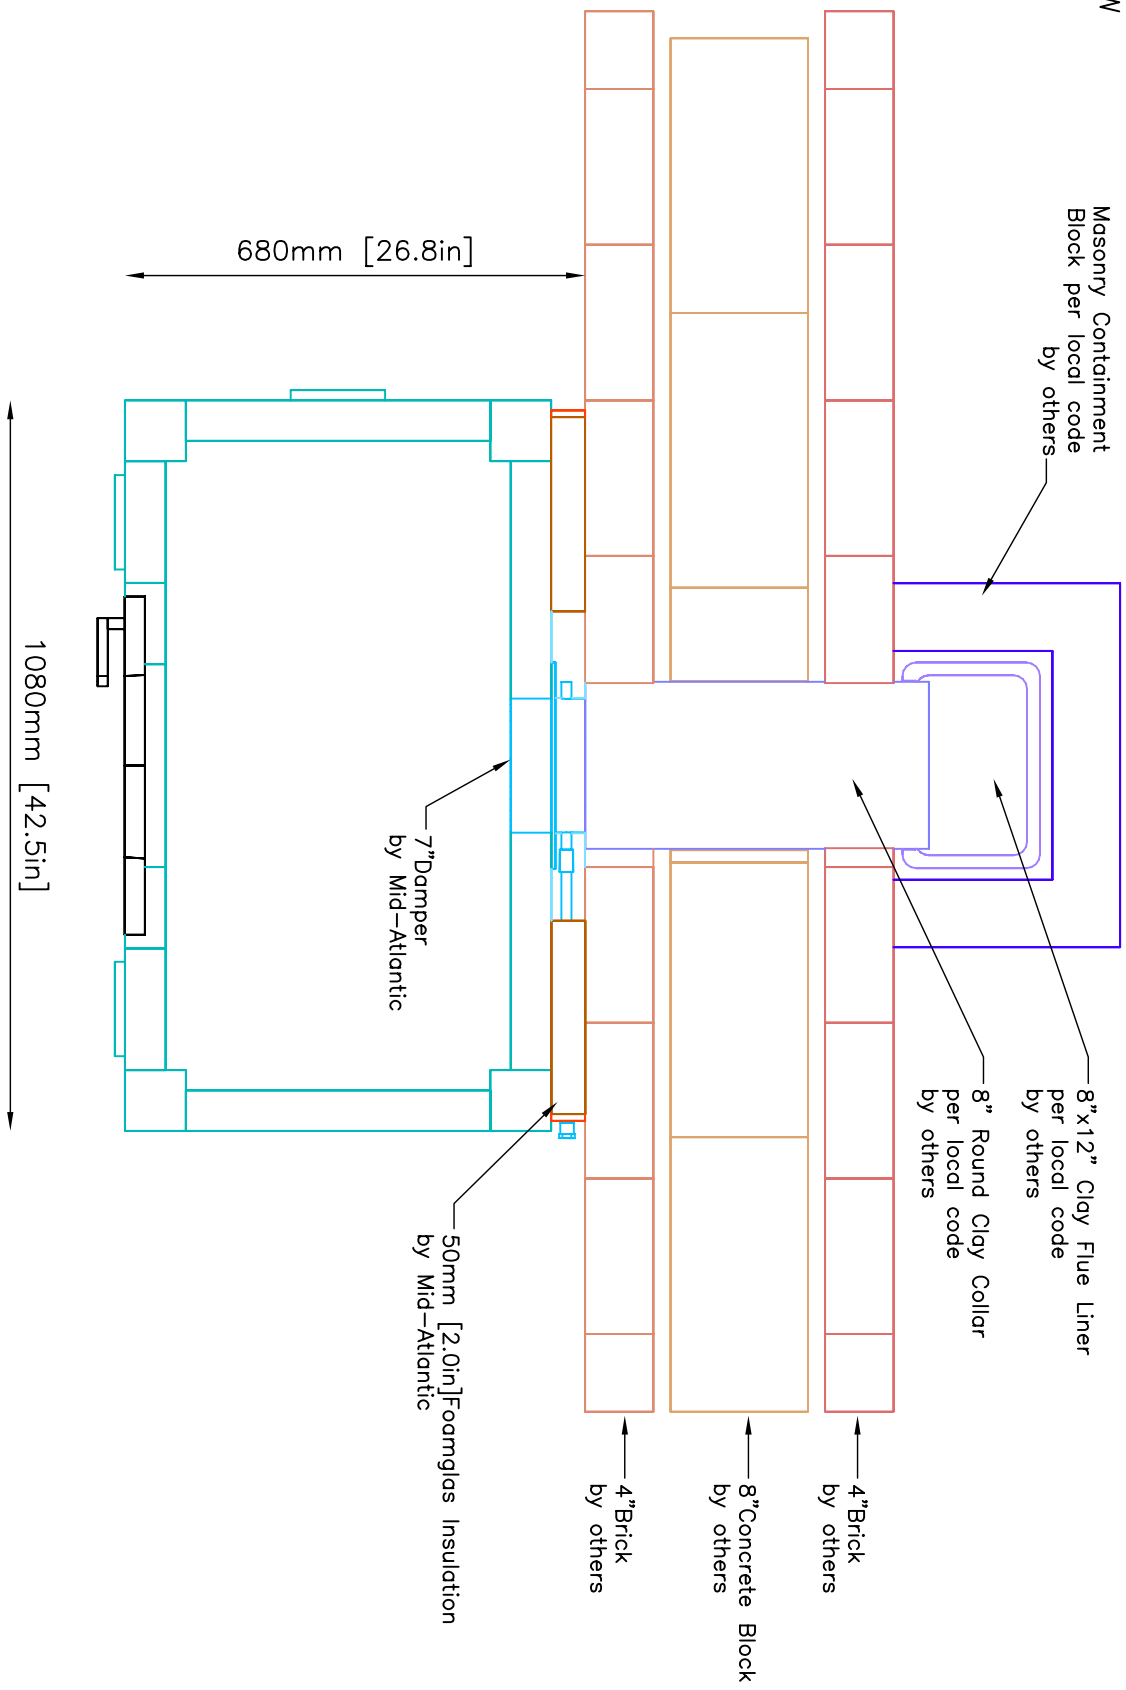


Revision: 1	Date: 10/21/03	By: DPB
Revision: 2	Date: 3/12/04	By: DPB

INFORMATION ONLY

FOUNDATION SLAB

Minimum 4" Thick Poured Concrete With Rebar 6"O.C.
 Minimum Dimensions--2" from Base of Unit

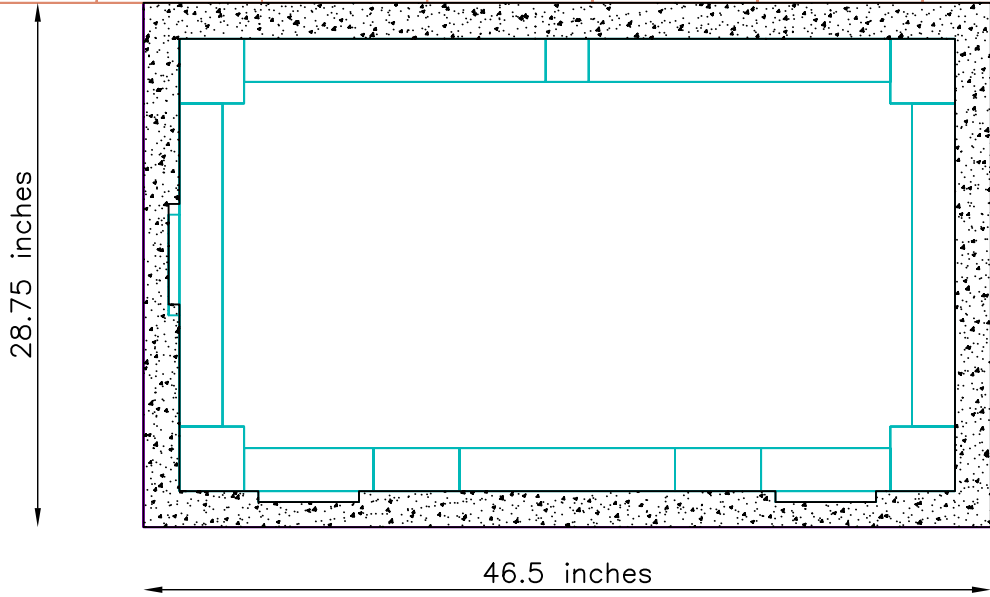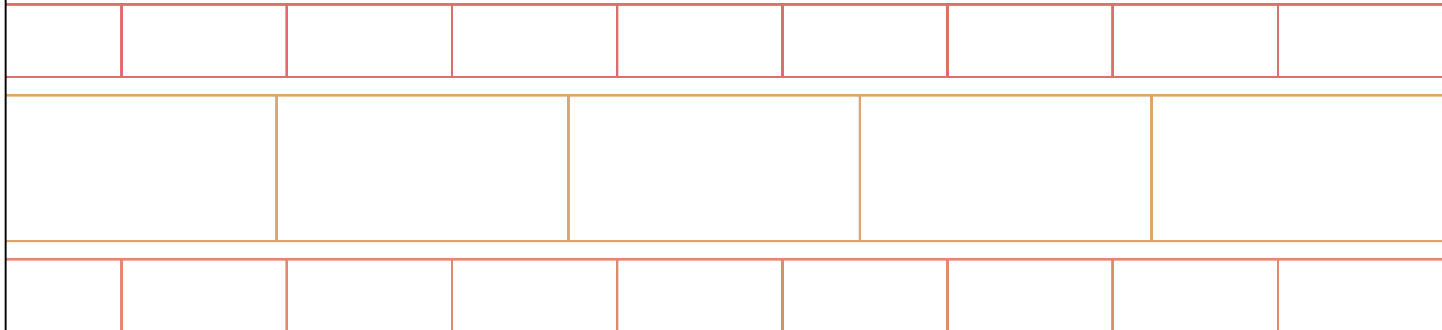


NOTE:
 TOP OF FOUNDATION SLAB TO BE LEVEL AND FLUSH WITH SUB-FLOOR
 Tolerances: +/- 1/8" No addition cost to level slab
 +/- 1/4" \$150.00-\$200.00 additional cost to level slab
 +/- 1/2" \$500.00 additional cost to level slab

UNIT WEIGHT: 53500lbs.
 Owner/Contractor is responsible for engineering Foundation Slab to support weight of fireplace.

Revision: 1 Date: 10/21/03 By: DPB
 Revision: 2 Date: 3/12/04 By: DPB

FOUNDATION SLAB:
 * MINIMUM 4" THICK
 WITH REBAR 6" O.C.
 * NON-COMBUSTIBLE
 CEMENT BOARD
 under foundation slab
 (NOT PLYWOOD)

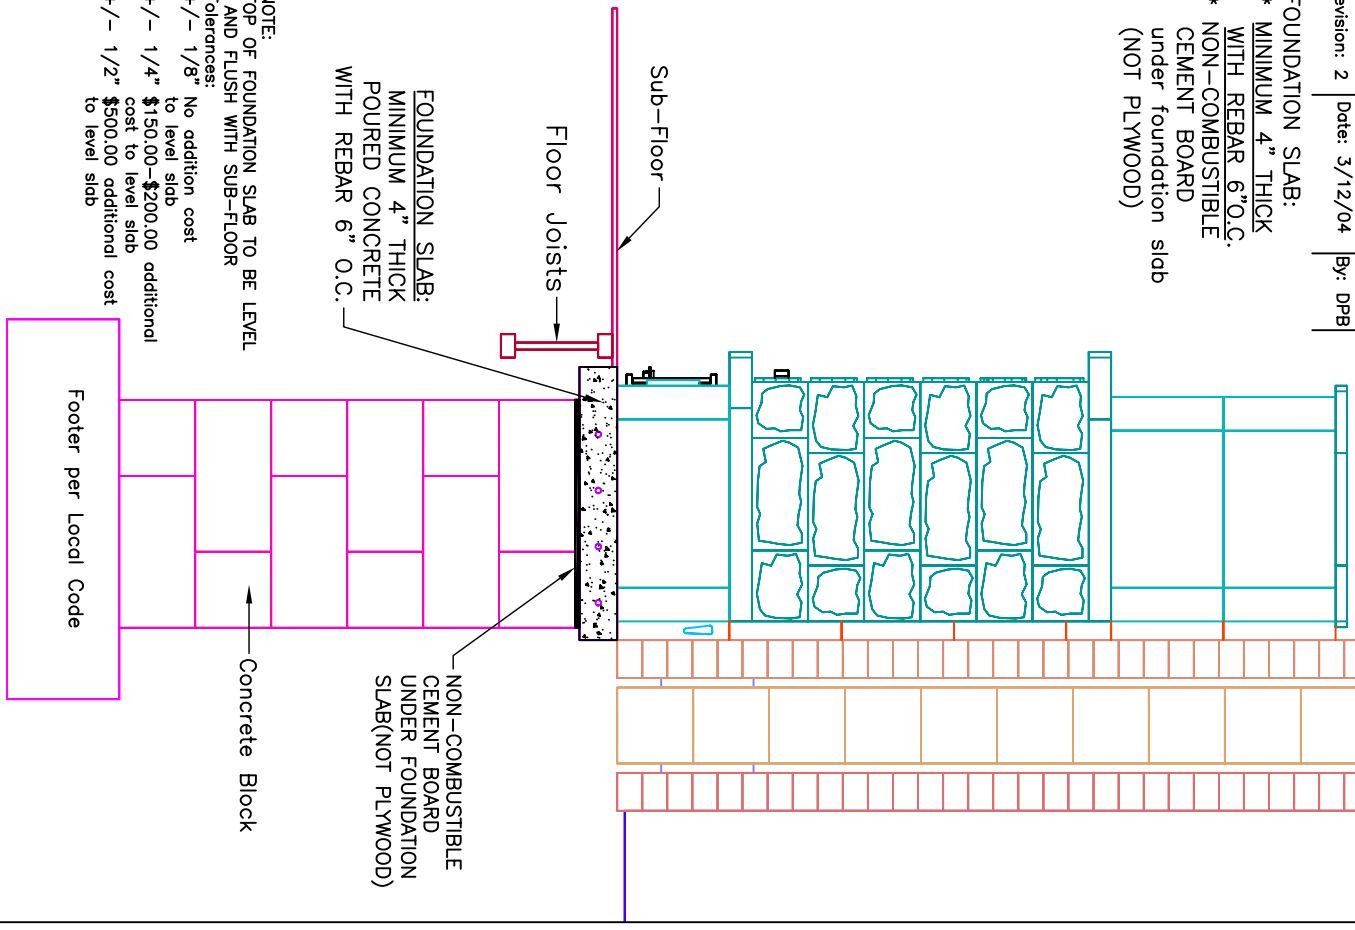

FOUNDATION SLAB:
 MINIMUM 4" THICK
 POURED CONCRETE
 WITH REBAR 6" O.C.


NON-COMBUSTIBLE
 CEMENT BOARD
 UNDER FOUNDATION
 SLAB (NOT PLYWOOD)

NOTE:
 TOP OF FOUNDATION SLAB TO BE LEVEL
 AND FLUSH WITH SUB-FLOOR
 Tolerances:
 +/- 1/8" No addition cost
 to level slab
 +/- 1/4" \$150.00-\$200.00 additional
 cost to level slab
 +/- 1/2" \$500.00 additional cost
 to level slab

Footer per Local Code

Concrete Block

UNIT WEIGHT: 5350lbs.
 Owner/Contractor is responsible for engineering Foundation Slab to support weight of fireplace.

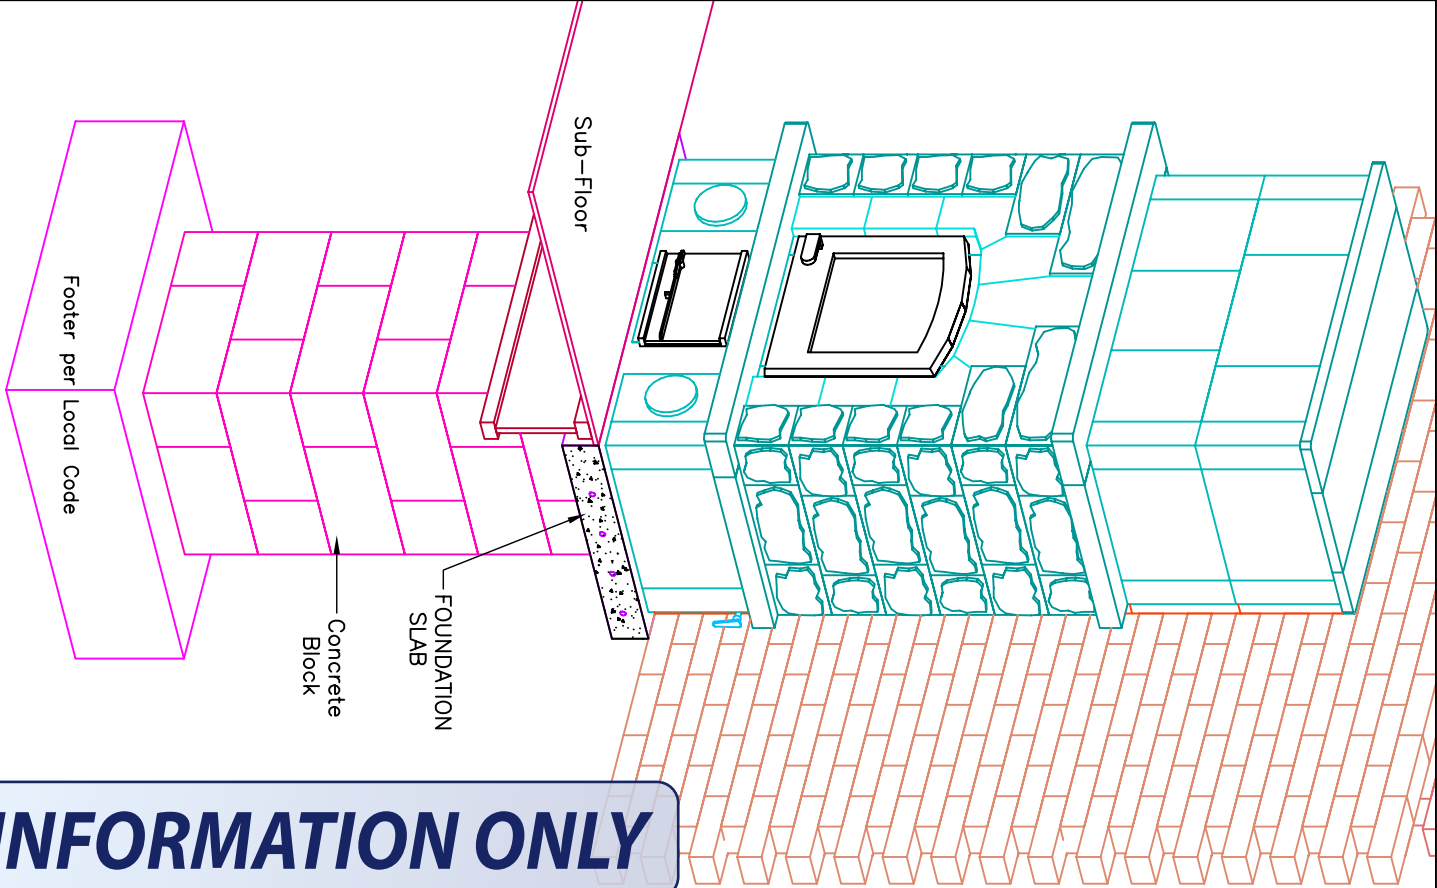

INFORMATION ONLY



MID-ATLANTIC MASONRY HEAT
 McIntire Business Park
 Charlottesville, VA 22903
 (434)979-9709 Fax 434-979-6416


PROJECT HIRSCH CONTRACT 5490
 MODEL TU2200 DRAWN BY D.P.BYRAM

VIEW Foundation Slab
 DATE 10/13/03

PAGE 6

INFORMATION ONLY

WALL ELEVATION

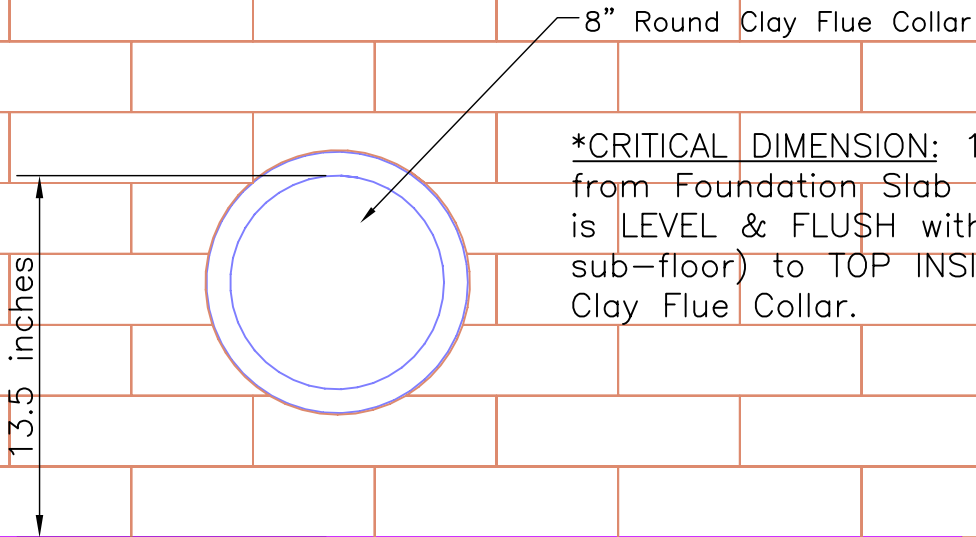

***CRITICAL DIMENSION:** 13 ½" from Foundation Slab (which is LEVEL & FLUSH with sub-floor) to TOP INSIDE Clay Flue Collar.

FOUNDATION SLAB

Thickness of Finished Floor—Maximum ¾".
 If Finished Floor exceeds ¾" Thickness
 Mid-Atlantic MUST be contacted for revised specifications.

Install Flue System per
 Manufacturers Instructions

Foamglas Insulation
 by Mid-Atlantic

8" x12"
 Clay Flue Liner
 by others

8" Round Clay
 Collar
 by others

7" Damper
 by Mid-Atlantic

Notes:

Flue Collar MUST be in place PRIOR to Installation.
 UL Listed – Minimum Foamglas Insulation 4" on sides
 & 6" on top of Flue Pipe.

Chimney Placement

***CRITICAL DIMENSION:** 13½" from Foundation Slab
 (which is LEVEL & FLUSH with sub-floor) to
 TOP INSIDE flue collar.