


INFORMATION ONLY



NOTE: Hearth Tiles CUT AND INSTALLED by others

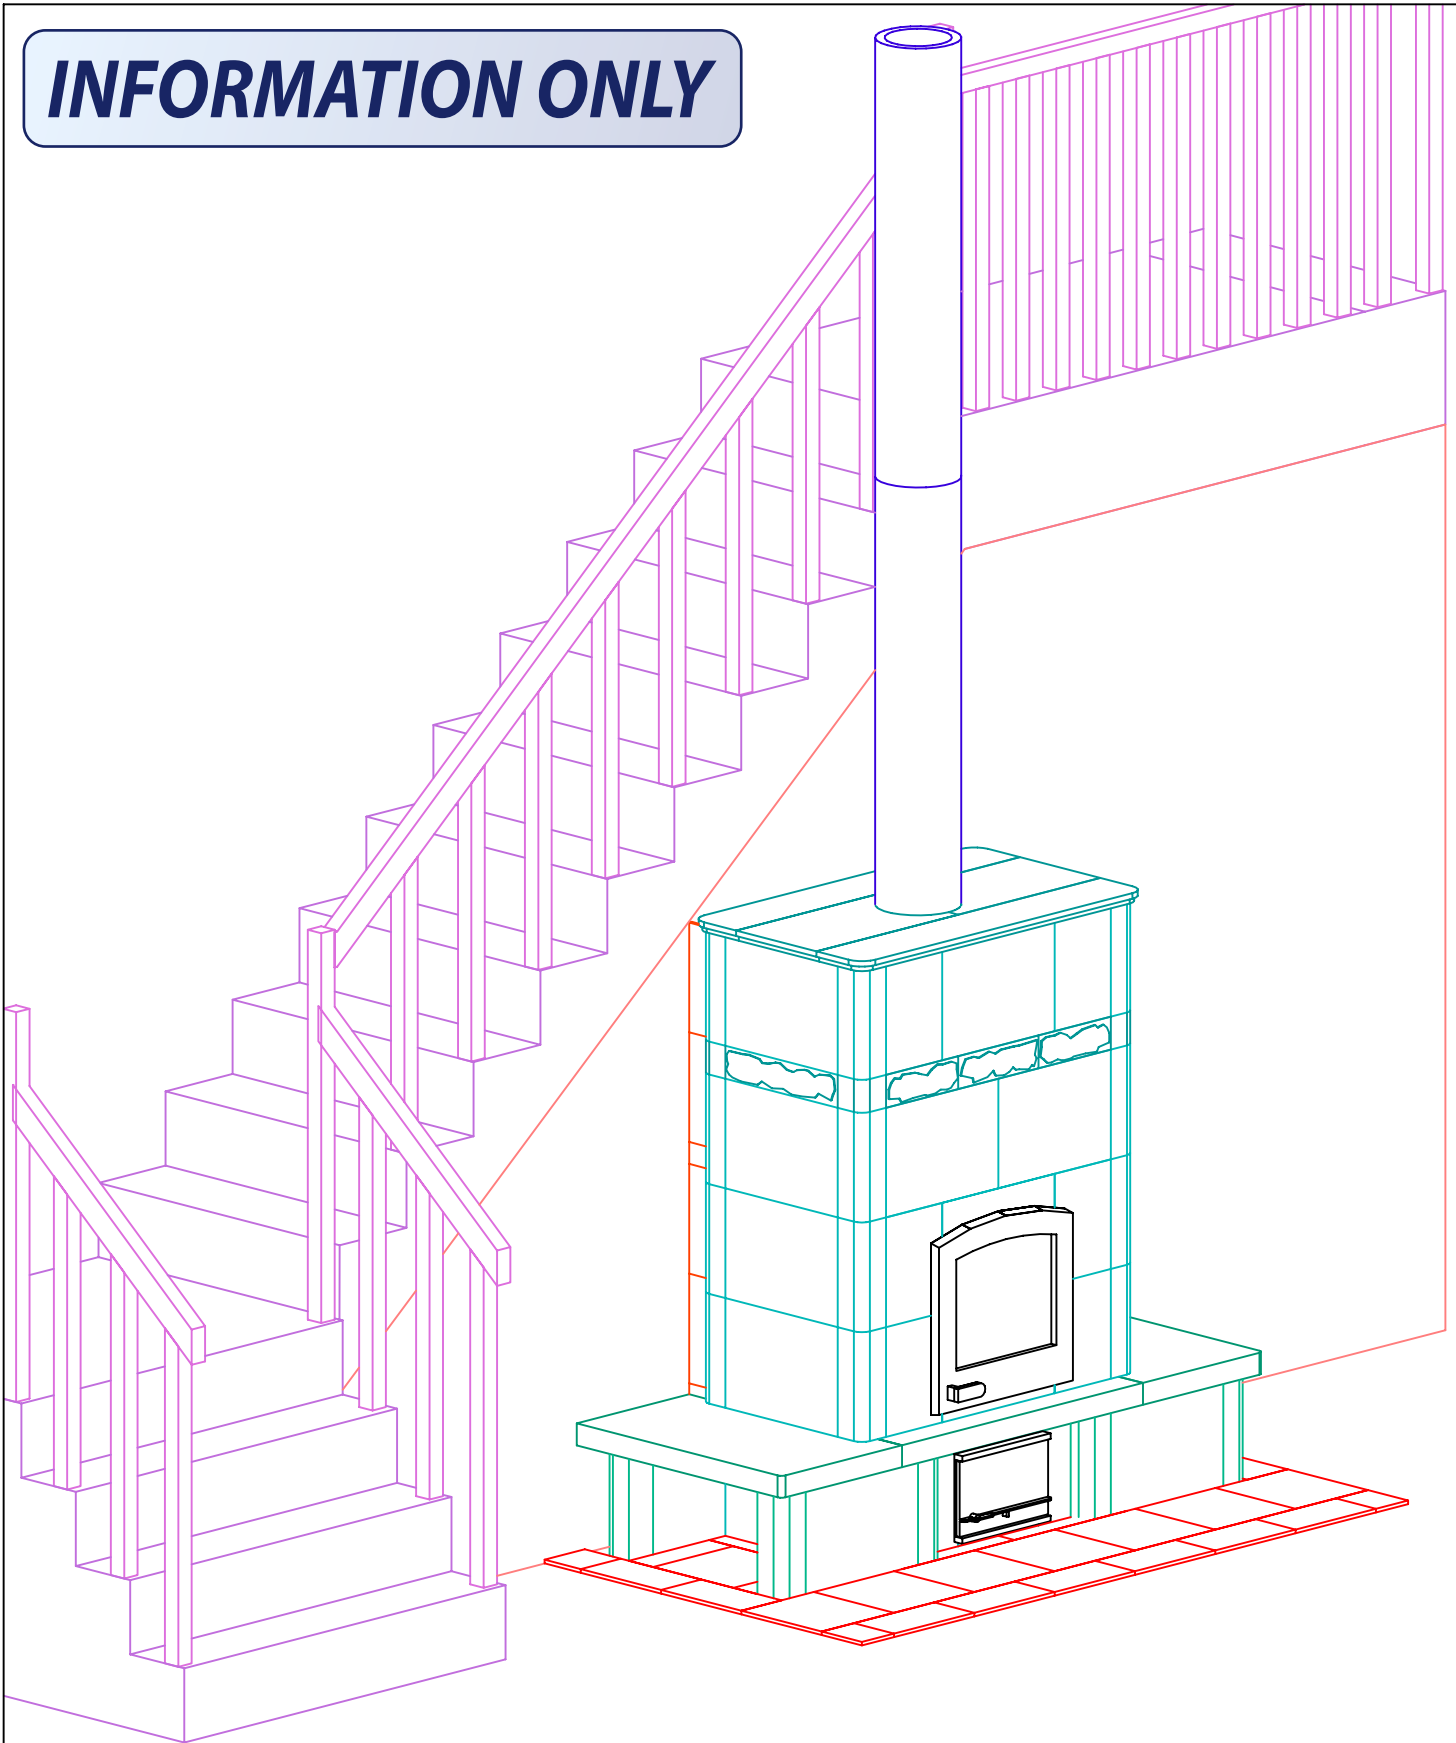

MID-ATLANTIC MASONRY HEAT
 1229 Harris Street Suite 1
 Charlottesville, VA 22903
 (434)979-9709 Fax 434-979-6416


PROJECT SHIFFLETT
 MODEL TU2200

CONTRACT
 DRAWN BY D.P.BYRAM

VIEW PERSPECTIVE
 DATE 10/16/03

PAGE 1

FRONT VIEW

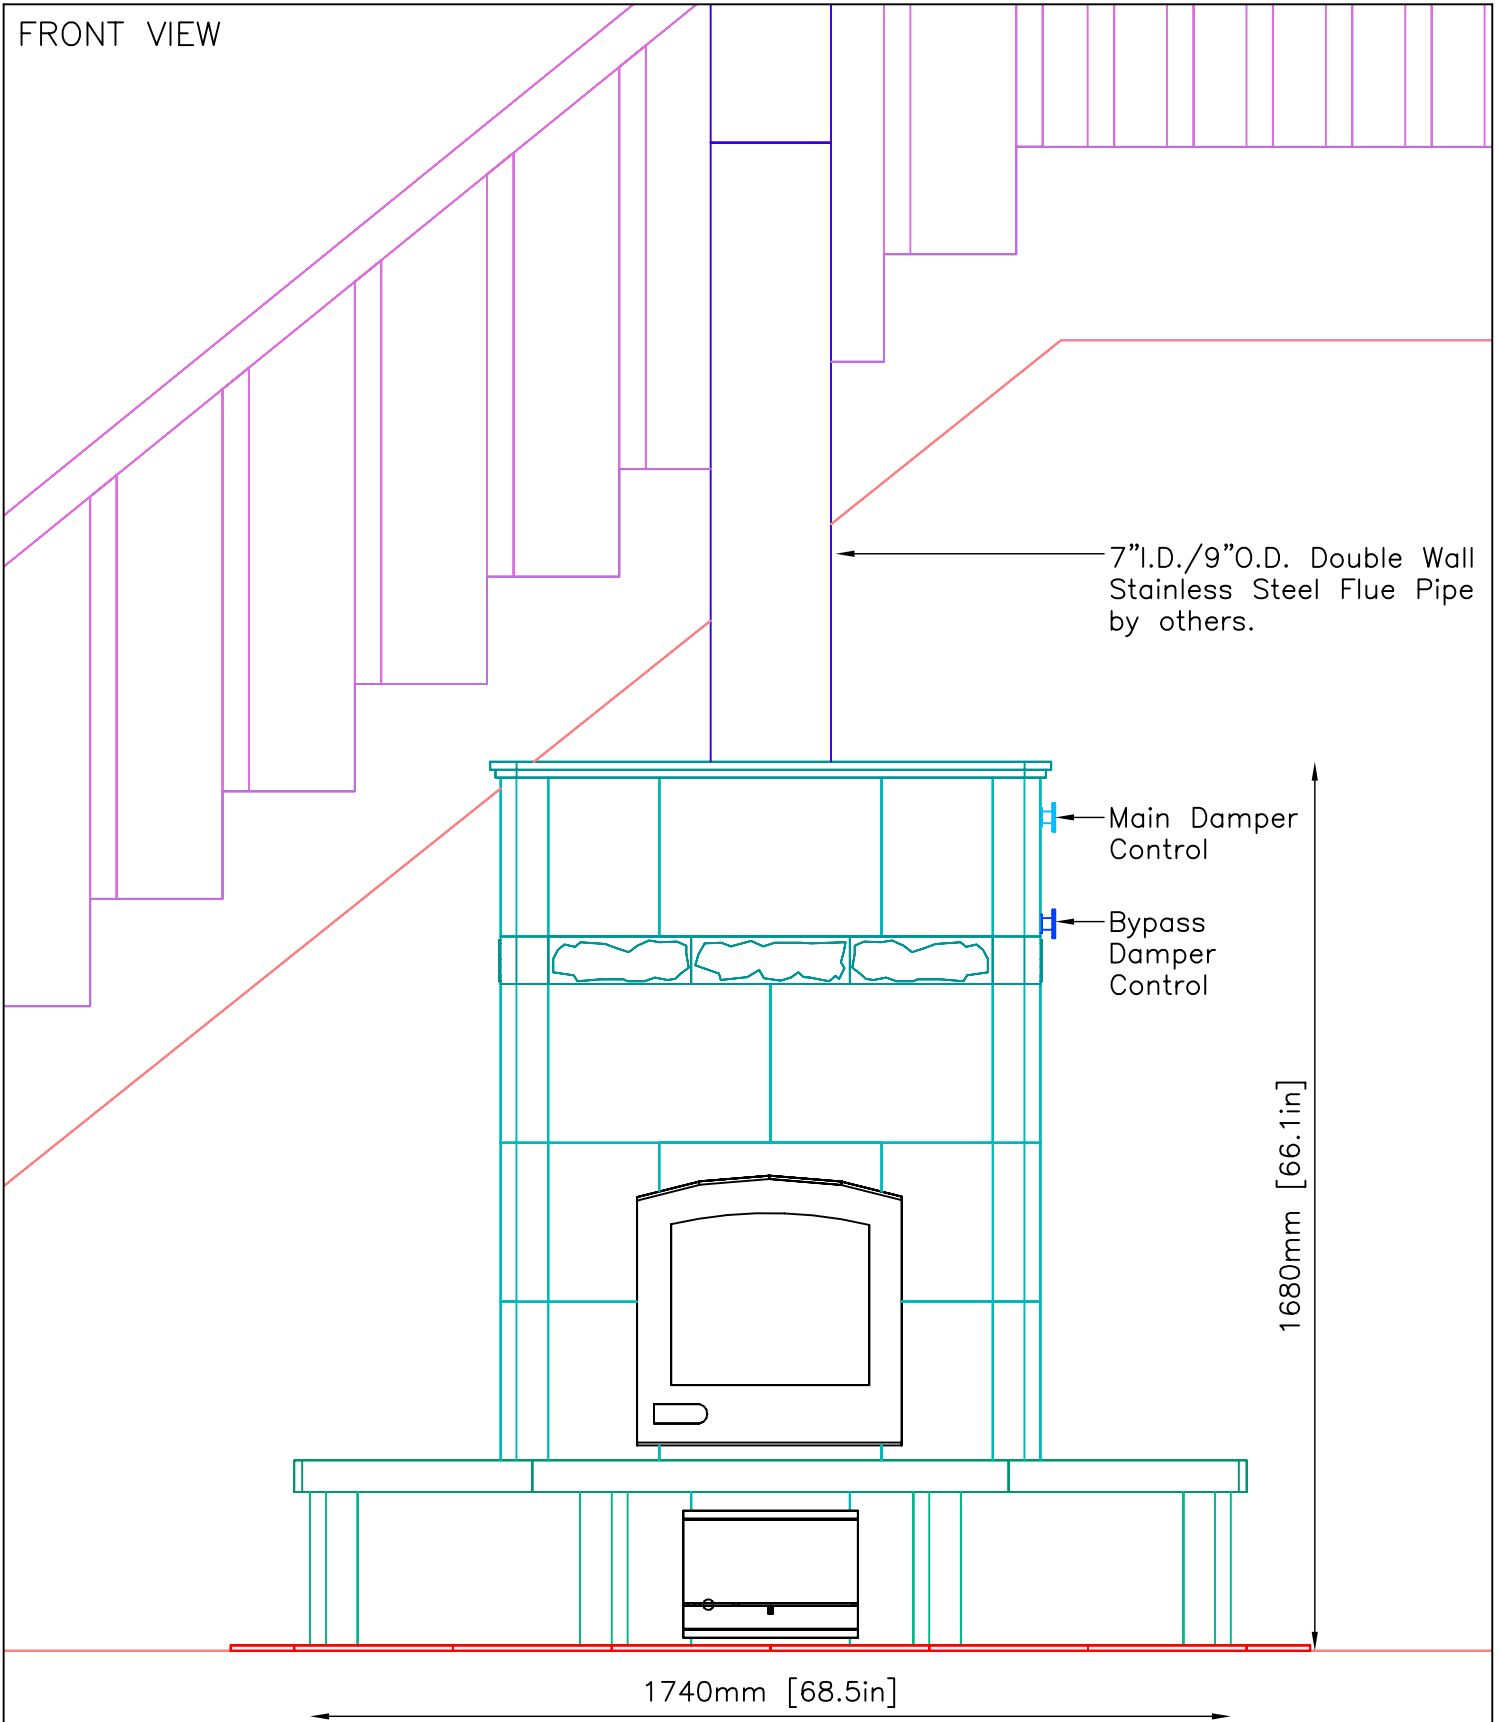

INFORMATION ONLY



MID-ATLANTIC MASONRY HEAT
 1229 Harris Street Suite 1
 Charlottesville, VA 22903
 (434)979-9709 Fax 434-979-6416

PROJECT SHIFFLETT
 MODEL TU2200

CONTRACT
 DRAWN BY D.P.BYRAM

VIEW FRONT
 DATE 10/16/03

PAGE 2

SIDE VIEW

7" I.D./9" O.D. Double Wall
Stainless Steel Flue
Pipe by others.

75mm [3.0in] Heat Shield
by Mid-Atlantic

Main
Damper
Control
Bypass
Damper
Control

Stairway

1680mm [66.1in]

660mm [26.0in]

90mm [3.5in] Air Intake
MUST be kept open.

INFORMATION ONLY



MID-ATLANTIC MASONRY HEAT
1229 Harris Street Suite 1
Charlottesville, VA 22903
(434)979-9709 Fax 434-979-6416

PROJECT SHIFFLETT
MODEL TU2200

CONTRACT
DRAWN BY D.P. BYRAM

VIEW SIDE
DATE 10/16/03


PAGE 3

Stairway

INFORMATION ONLY

1185mm [46.7in]

765mm [30.1in]

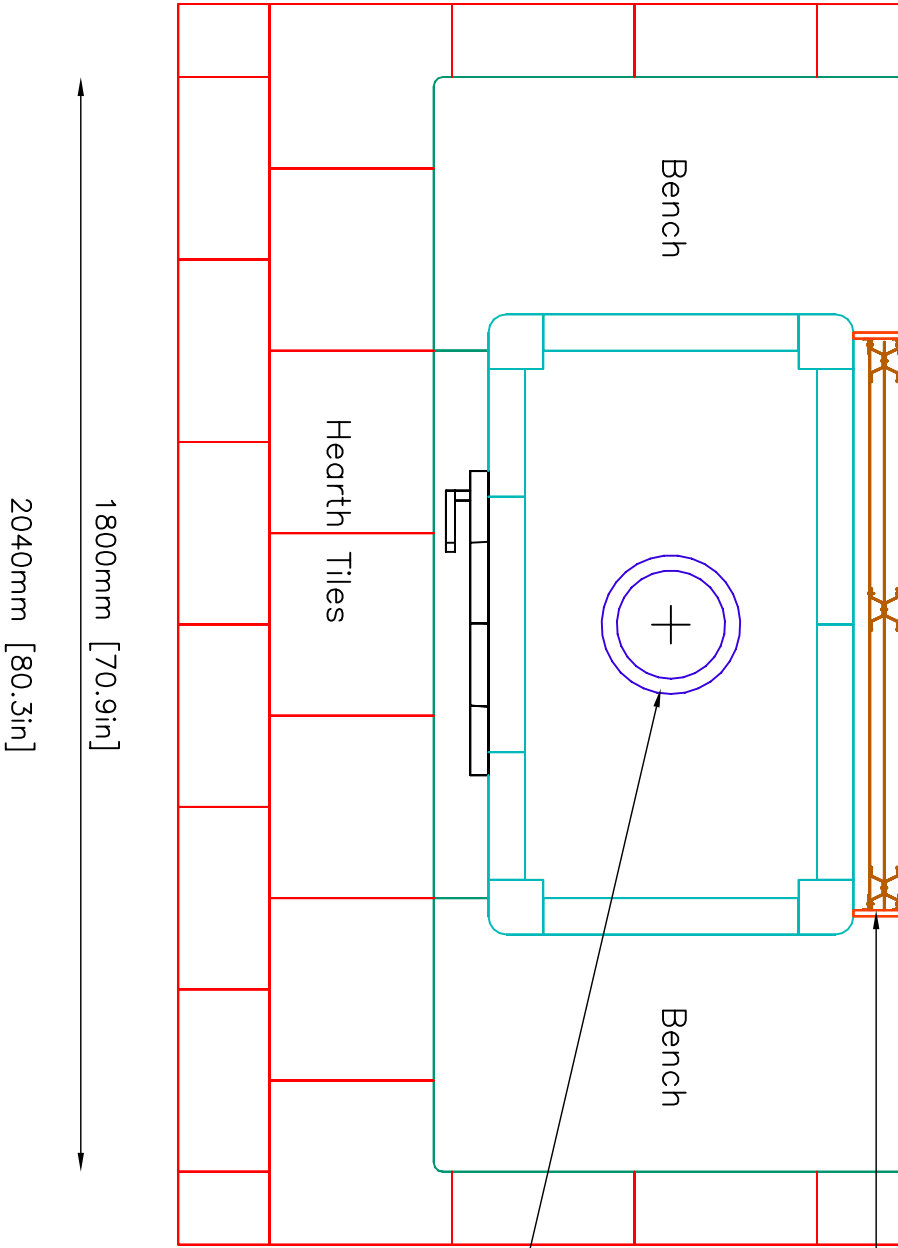

75mm [3.0in]
Heat Shield
by Mid-Atlantic


7" I.D./9" O.D. Double
Wall Stainless Steel
Flue Pipe
by others.
See page 5
for Flue Location

1800mm [70.9in]
2040mm [80.3in]

NOTE: Hearth Tiles CUT AND INSTALLED by others

FOUNDATION SLAB

Minimum 4" Thick Poured Concrete With Rebar 6"O.C.
 Minimum Dimensions—2" from Base of Unit

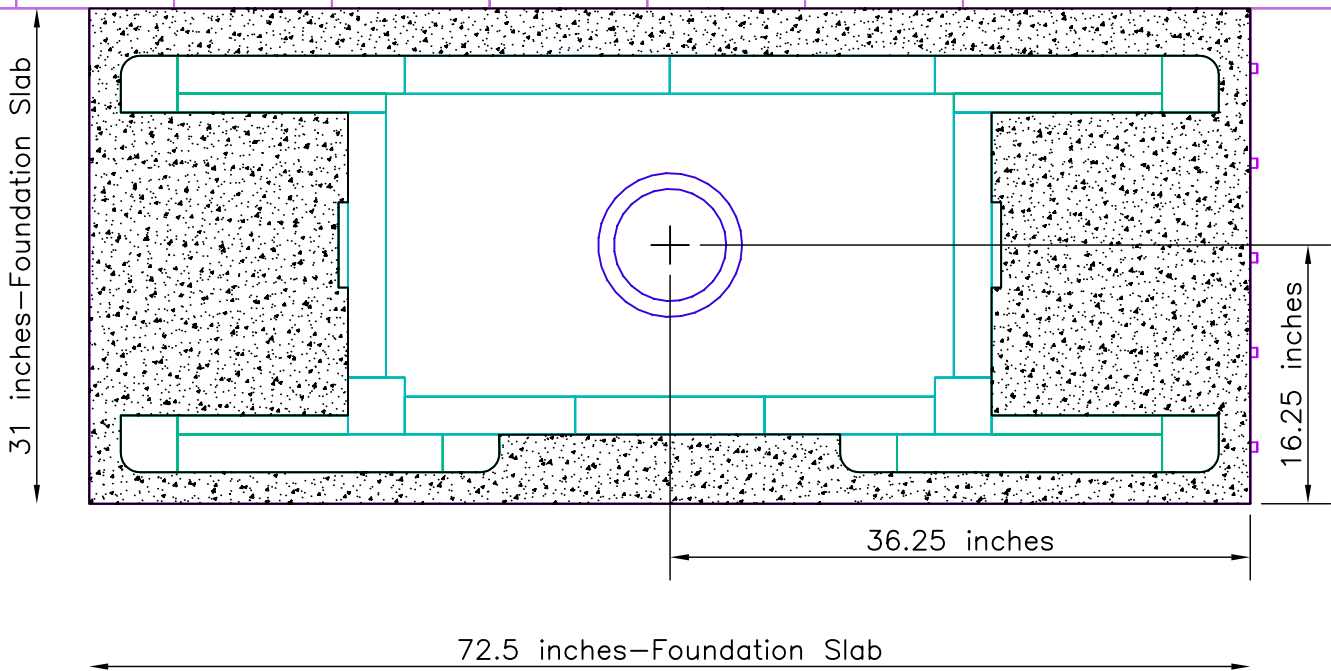

FLUE LOCATION:
 From Lower Right Corner of Foundation Slab:
 16¼" x 36¼" to CENTER of Flue Pipe.

INFORMATION ONLY

NOTE:
 TOP OF FOUNDATION SLAB TO BE LEVEL AND FLUSH WITH SUB-FLOOR
 Tolerances: +/- 1/8" No addition cost to level slab
 +/- 1/4" \$150.00-\$200.00 additional cost to level slab
 +/- 1/2" \$500.00 additional cost to level slab

UNIT WEIGHT: MINIMUM XXXX lbs.
 Contractor is responsible for engineering foundation slab to support weight of fireplace.



MID-ATLANTIC MASONRY HEAT
 1229 Harris Street Suite 1
 Charlottesville, VA 22903
 (434)979-9709 Fax 434-979-6416


PROJECT SHIFFLETT
 MODEL TU2200

CONTRACT
 DRAWN BY D.P.BYRAM

VIEW SUPPORT
 DATE 10/16/03

PAGE 5

FOUNDATION SLAB:
 * MINIMUM 4" THICK
 WITH REBAR 6" O.C.
 * NONCOMBUSTIBLE
 CEMENT BOARD
 under foundation slab
 (NOT PLYWOOD)

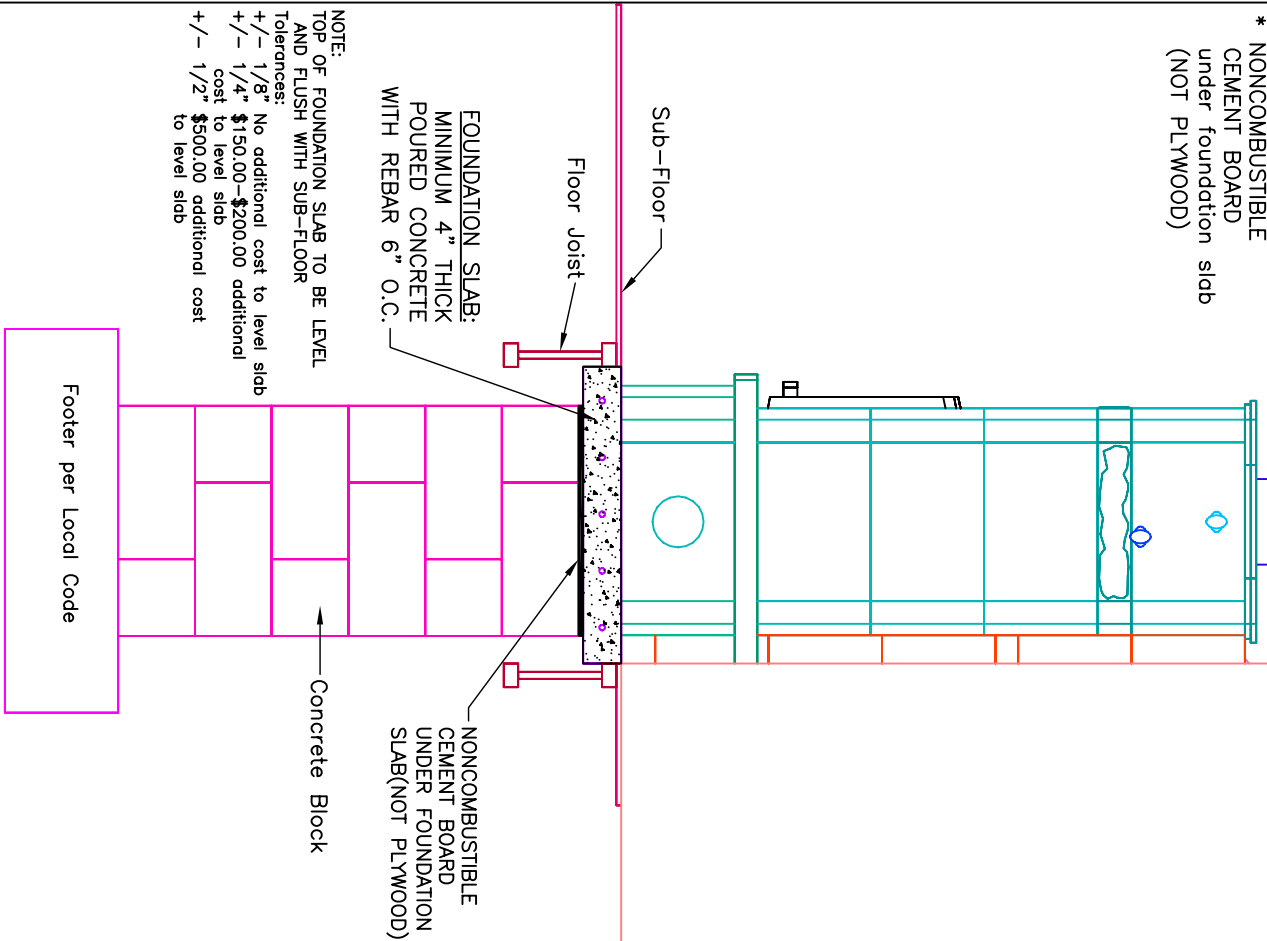

FOUNDATION SLAB:
 MINIMUM 4" THICK
 POURED CONCRETE
 WITH REBAR 6" O.C.


NONCOMBUSTIBLE
 CEMENT BOARD
 UNDER FOUNDATION
 SLAB (NOT PLYWOOD)

NOTE:
 TOP OF FOUNDATION SLAB TO BE LEVEL
 AND FLUSH WITH SUB-FLOOR
 Tolerances:
 +/- 1/8" No additional cost to level slab
 +/- 1/4" \$150.00-\$200.00 additional
 cost to level slab
 +/- 1/2" \$500.00 additional cost
 to level slab

Footer per Local Code

Concrete Block

UNIT WEIGHT: MINIMUM xxxxxlbs.
 Contractor is responsible for engineering foundation slab to support weight of fireplace.

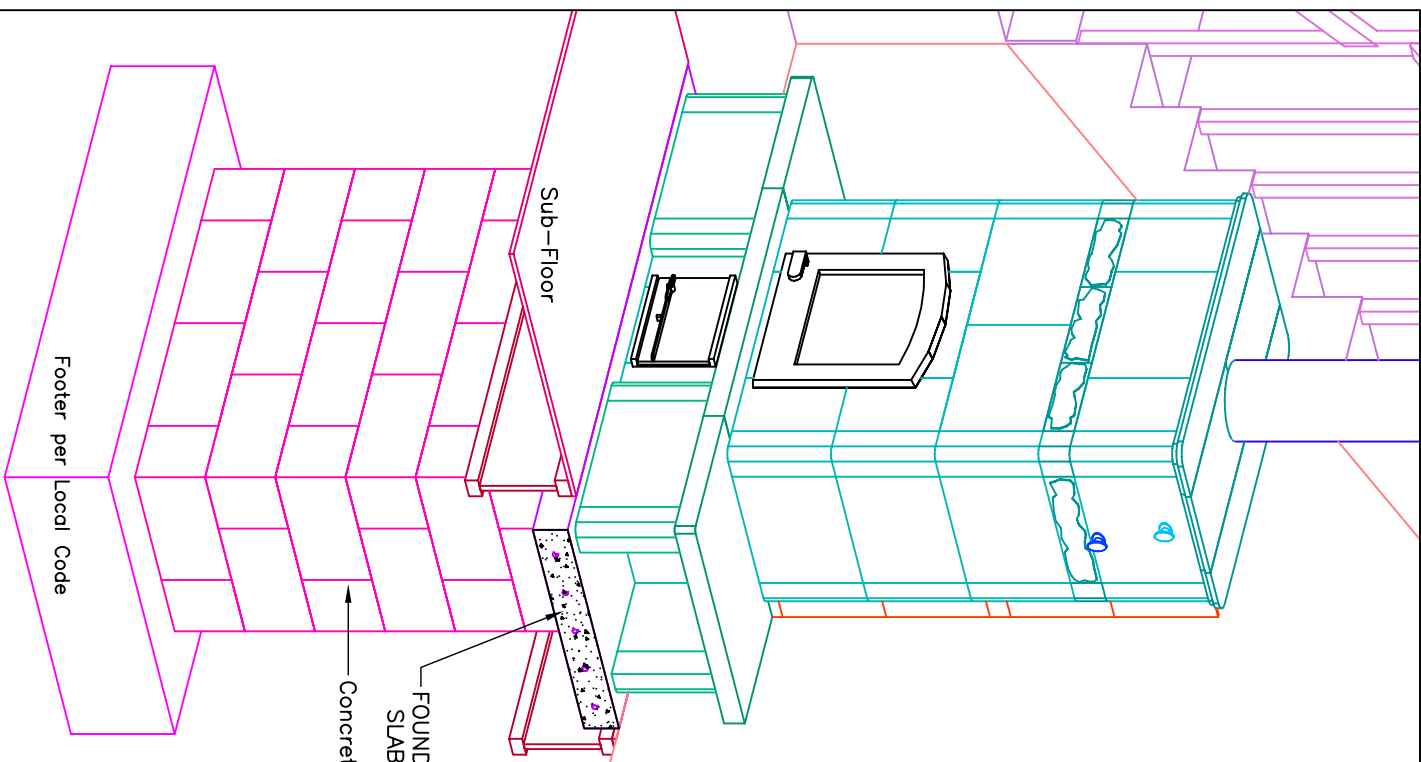

INFORMATION ONLY



MID-ATLANTIC MASONRY HEAT
 McIntire Business Park
 Charlottesville, VA 22903
 (434)979-9709 Fax 434-979-6416

PROJECT SHIFFLETT
 MODEL TU2200

CONTRACT
 DRAWN BY D.P. BYRAM

VIEW Foundation Slab
 DATE 10/16/03

PAGE 6